
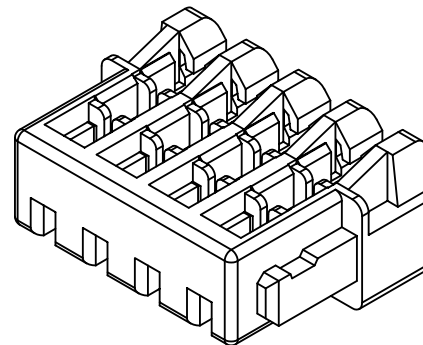


Circuit 1

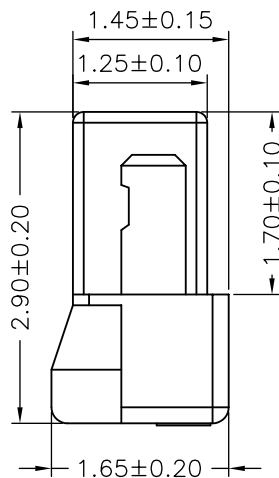



**SPECIFICATIONS**  
 Current Rating: 0.5A AC,DC  
 Voltage Rating: 30V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 100MΩ Min.  
 Withstanding Voltage: 200V AC/minute  
 Contacts: Phosphor Bronze/Tin-plated  
 Material: Nylon 46,UL94V-0  
 Color: Natural(Beige)

**Ordering Information & Dimensions**

PART NO.	Dimensions	
	A	B
A0800HI-02P	0.80	2.40
A0800HI-03P	1.60	3.20
A0800HI-04P	2.40	4.00
A0800HI-05P	3.20	4.80
A0800HI-06P	4.00	5.60
A0800HI-07P	4.80	6.40
A0800HI-08P	5.60	7.20
A0800HI-10P	7.20	8.80
A0800HI-12P	8.80	10.40
A0800HI-14P	10.40	12.00
A0800HI-15P	11.20	12.80
A0800HI-16P	12.00	13.60
A0800HI-17P	12.80	14.40
A0800HI-20P	15.20	16.80

**NOTES:**

Applicable Wire: AWG#32  
 Insulation O.D.: 0.38mm

					JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.	
			UNIT	SCALE	SHEET	TITLE:
			mm		1 of 1	0.80mm PITCH I. D. C. HOUSING
A4	REVISE	2008.05.09	DRAWN BY	APPROVED BY		
A3	REVISE	2008.03.31	李勤	董正一		
A2	REVISE	2007.11.13	2006.02.07		2006.02.07	
A1	REVISE	2006.04.15	GENERAL TOLERANCE			
A0	NEW RELEASE	2006.02.07	X. X±0.25	ANGLE±		
REV.	DESCRIPTION	DATE	X. XX±0.15			
			X. XXX±0.05			
			DRAW NO. :		A0800HI-XP	REV. A4