


SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 50V AC,DC
 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Contact Resistance: $20\text{m}\Omega$ Max.
 Insulation Resistance: $100\text{M}\Omega$ Min.
 Withstanding Voltage: 500V AC/minute
 Material: PBT,UL94V-0
 Color: Natural(White)

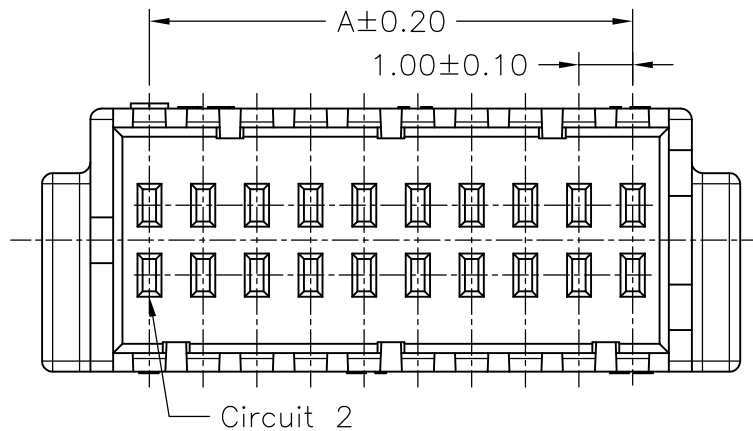

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A1001H-2X06P	5.00	9.00
A1001H-2X08P	7.00	11.00
A1001H-2X10P	9.00	13.00
A1001H-2X15P	14.00	18.00
A1001H-2X20P	19.00	23.00
A1001H-2X25P	24.00	28.00

				UNIT	SCALE	SHEET	TITLE:	
				mm		1 of 1	1.00mm PITCH HOUSING-DUAL ROW	
				DRAWN BY	APPROVED BY			
				董正一	董正一			
				2003.04.15	2003.04.15			
				GENERAL TOLERANCE				
B1	REVISE	2007.06.14	X. X±0.25	ANGLE±				
B0	NEW RELEASE	2006.04.14	X. XX±0.15					
REV.	DESCRIPTION	DATE	X. XXX±0.05					
						DRAW NO.:	REV.	
						A1001H-2XNP	B1	