


**SPECIFICATIONS**  
 Current Rating: 1A AC,DC  
 Voltage Rating: 100V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 30mΩ Max.  
 Insulation Resistance: 500MΩ Min.  
 Withstanding Voltage: 500V AC/minute  
 Shell: Phosphor Bronze/Nickel-plated  
 15u"(Min.)  
 Material: Nylon 66,UL94V-0  
 Color: Natural(Beige)


**Ordering Information & Dimensions**

PART NO.	Dimensions	
	A	B
A1007H-08P	7.00	11.50
A1007H-14P	13.00	17.50
A1007H-20P	19.00	23.50
A1007H-30P	29.00	33.50

UNIT		SCALE	SHEET		TITLE:
mm			1 of 2		
DRAWN BY 蕭惠風 2002.10.17		APPROVED BY 董正一 2002.10.17		<b>1.00mm PITCH HOUSING</b>	
GENERAL TOLERANCE					
B1	REVISE	2007.05.31	X. X±0.25		ANGLE±
B0	NEW RELEASE	2006.06.12	X. XX±0.15		
REV.	DESCRIPTION	DATE	X. XXX±0.05	DRAW NO. : A1007H-XP	
					REV. B1

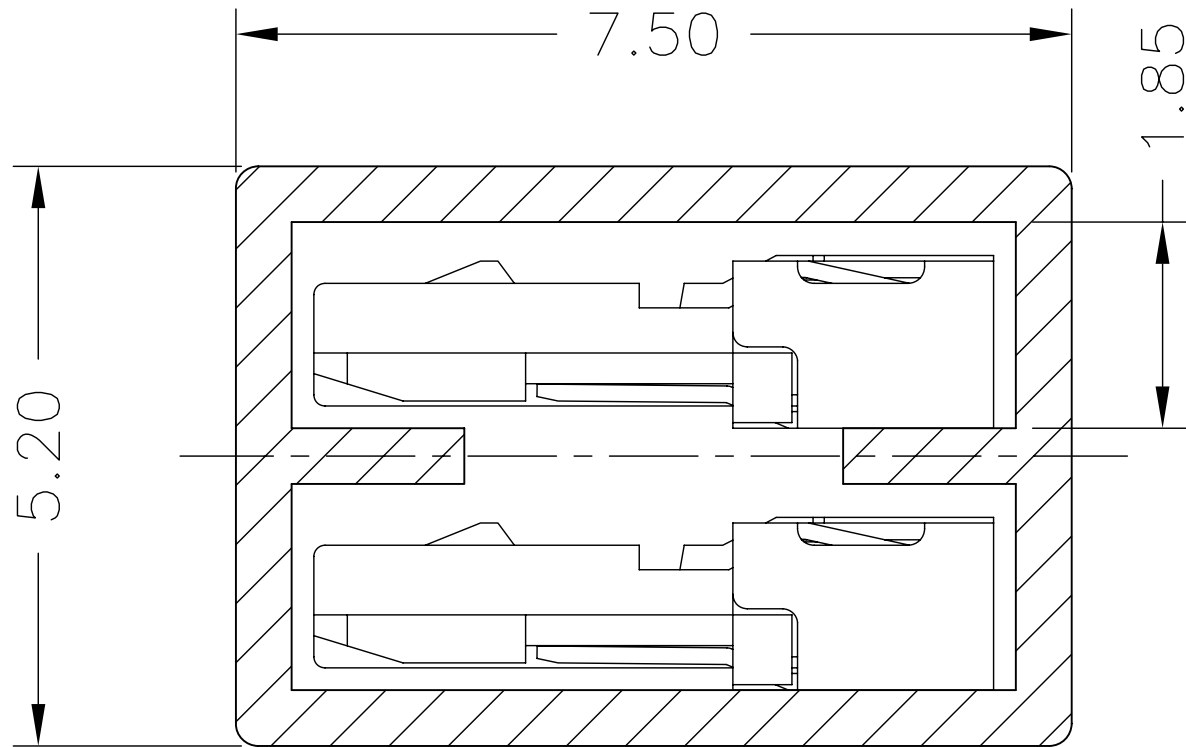

Number of Contacts	Dimensions	Q'ty/Tube
08P	580X5.20X7.50	96
14P		62
20P		46
30P		32

			 JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.		
			UNIT	SCALE	SHEET
			mm		2 of 2
			DRAWN BY	APPROVED BY	
			董正一	董正一	
			2005.04.12	2005.04.12	
			GENERAL TOLERANCE		
			X. X±0.25	ANGLE±	
			X. XX±0.15	▽	
			X. XXX±0.05	⊕	
B0	NEW RELEASE	2006.06.12	DRAW NO. : A1007H-XP		
REV.	DESCRIPTION	DATE	REV. B0		

TITLE:  
1.00mm PITCH  
HOUSING, TUBE SPEC.