


P.C.B LAYOUT



SPECIFICATIONS




Current Rating: 1A AC,DC  
 Voltage Rating: 125V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 100MΩ Min.  
 Withstanding Voltage: 500V AC/minute  
 Pin Material: Phosphor Bronze/Tin-plated  
 Solder Tabs: Brass/Tin-plated  
 Material: Nylon 6T,UL94V-0  
 Color: Natural(Beige)

Ordering Information & Dimensions





PART NO.	Dimensions	
	A	B
A1250WRA-S-02P	1.25	7.75
A1250WRA-S-03P	2.50	9.00
A1250WRA-S-04P	3.75	10.25
A1250WRA-S-05P	5.00	11.50
A1250WRA-S-06P	6.25	12.75
A1250WRA-S-07P	7.50	14.00
A1250WRA-S-08P	8.75	15.25
A1250WRA-S-09P	10.00	16.50
A1250WRA-S-10P	11.25	17.75
A1250WRA-S-11P	12.50	19.00
A1250WRA-S-12P	13.75	20.25
A1250WRA-S-13P	15.00	21.50
A1250WRA-S-14P	16.25	22.75
A1250WRA-S-15P	17.50	24.00
A1250WRA-S-16P	18.75	25.25
A1250WRA-S-17P	20.00	26.50
A1250WRA-S-18P	21.25	27.75

			UNIT	SCALE	SHEET	TITLE:
			mm		1 of 3	
DRAWN BY		APPROVED BY		<p>1.25mm PITCH 90° WAFER-SMT TYPE</p>		
董正一		董正一				
2002.05.08		2002.05.08		DRAW NO. :		
GENERAL TOLERANCE						REV. B0
X. X±0.25		ANGLE±		A1250WRA-S-XP		
X. XX±0.15		▽				
X. XXX±0.05		⊕				
B0	NEW RELEASE	2006.06.23				
REV.	DESCRIPTION	DATE				

### 02~08 Contacts

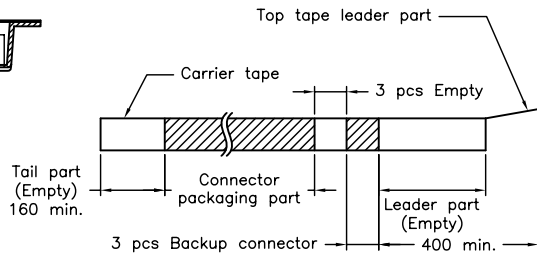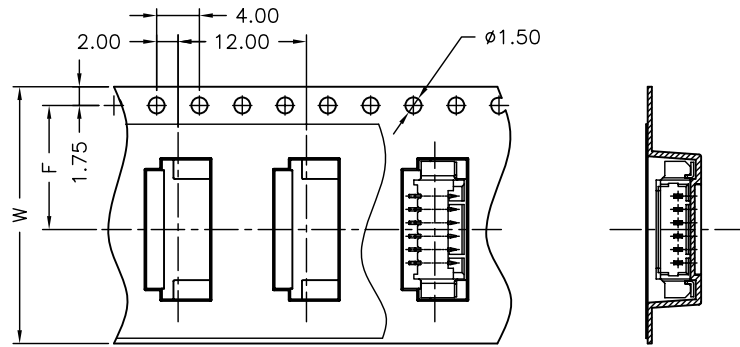

### 09~18 Contacts

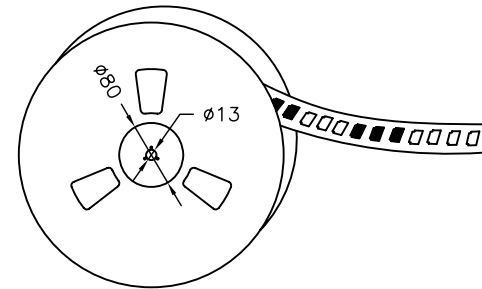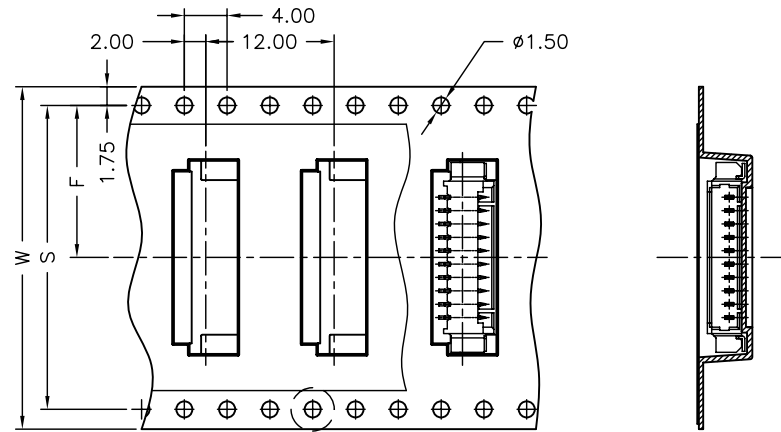

Number of Contacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel
02P	16	7.50	/	1,000
03P	16	7.50		1,000
04P	24	11.50		1,000
05P	24	11.50		1,000
06P	24	11.50		1,000
07P	24	11.50		1,000
08P	24	11.50		1,000
09P	32	14.20		28.40
10P	32	14.20	28.40	1,000
11P	32	14.20	28.40	1,000
12P	32	14.20	28.40	1,000
13P	32	14.20	28.40	1,000
14P	44	20.20	40.40	1,000
15P	44	20.20	40.40	1,000
16P	44	20.20	40.40	1,000
17P	44	20.20	40.40	1,000
18P	44	20.20	40.40	1,000

			UNIT	SCALE	SHEET
			mm		2 of 3
			DRAWN BY	APPROVED BY	
			董正一	董正一	
			2004.11.09	2004.11.09	
			GENERAL TOLERANCE		
			X. X±0.25	ANGLE±	
			X. XX±0.15		
			X. XXX±0.05		
B0	NEW RELEASE	2006.06.23	TITLE: 1.25mm PITCH 90° WAFER-SMT TYPE TAPING SPEC.		
REV.	DESCRIPTION	DATE			
			DRAW NO. :		REV.
			A1250WRA-S-XP		B0