


**SPECIFICATIONS**

Current Rating: 1A AC,DC  
 Voltage Rating: 125V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 100MΩ Min.  
 Withstanding Voltage: 500V AC/minute  
 Pin Material: Phosphor Bronze/Gold-flash  
 Solder Tabs: Phosphor Bronze/Gold-flash  
 Material: Nylon 6T,UL94V-0  
 Color: Natural(Beige)  
 Cap: Nylon 6T,UL94V-0,Natural(Beige)



**Ordering Information & Dimensions**

PART NO.	Dimensions					
	A	B	C	D	E	F
A1250WV-S-02PD20	1.25	3.05	2.35	4.25	7.25	7.65
A1250WV-S-03PD20	2.50	4.30	3.60	5.50	8.50	8.90
A1250WV-S-04PD20	3.75	5.55	4.85	6.75	9.75	10.15
A1250WV-S-05PD20	5.00	6.80	6.10	8.00	11.00	11.40
A1250WV-S-06PD20	6.25	8.05	7.35	9.25	12.25	12.65
A1250WV-S-07PD20	7.50	9.30	8.60	10.50	13.50	13.90
A1250WV-S-08PD20	8.75	10.55	9.85	11.75	14.75	15.15
A1250WV-S-09PD20	10.00	11.80	11.10	13.00	16.00	16.40
A1250WV-S-10PD20	11.25	13.50	12.35	14.25	17.25	17.65
A1250WV-S-11PD20	12.50	14.30	13.60	15.50	18.50	18.90
A1250WV-S-12PD20	13.75	15.55	14.85	16.75	19.75	20.15
A1250WV-S-13PD20	15.00	16.80	16.10	18.00	21.00	21.40
A1250WV-S-14PD20	16.25	18.05	17.35	19.25	22.25	22.65
A1250WV-S-15PD20	17.50	19.30	18.60	20.50	23.50	23.90
A1250WV-S-16PD20	18.75	20.55	19.85	21.75	24.75	25.15
A1250WV-S-17PD20	20.00	21.80	21.10	23.00	26.00	26.40
A1250WV-S-18PD20	21.25	23.05	22.35	24.25	27.25	27.65


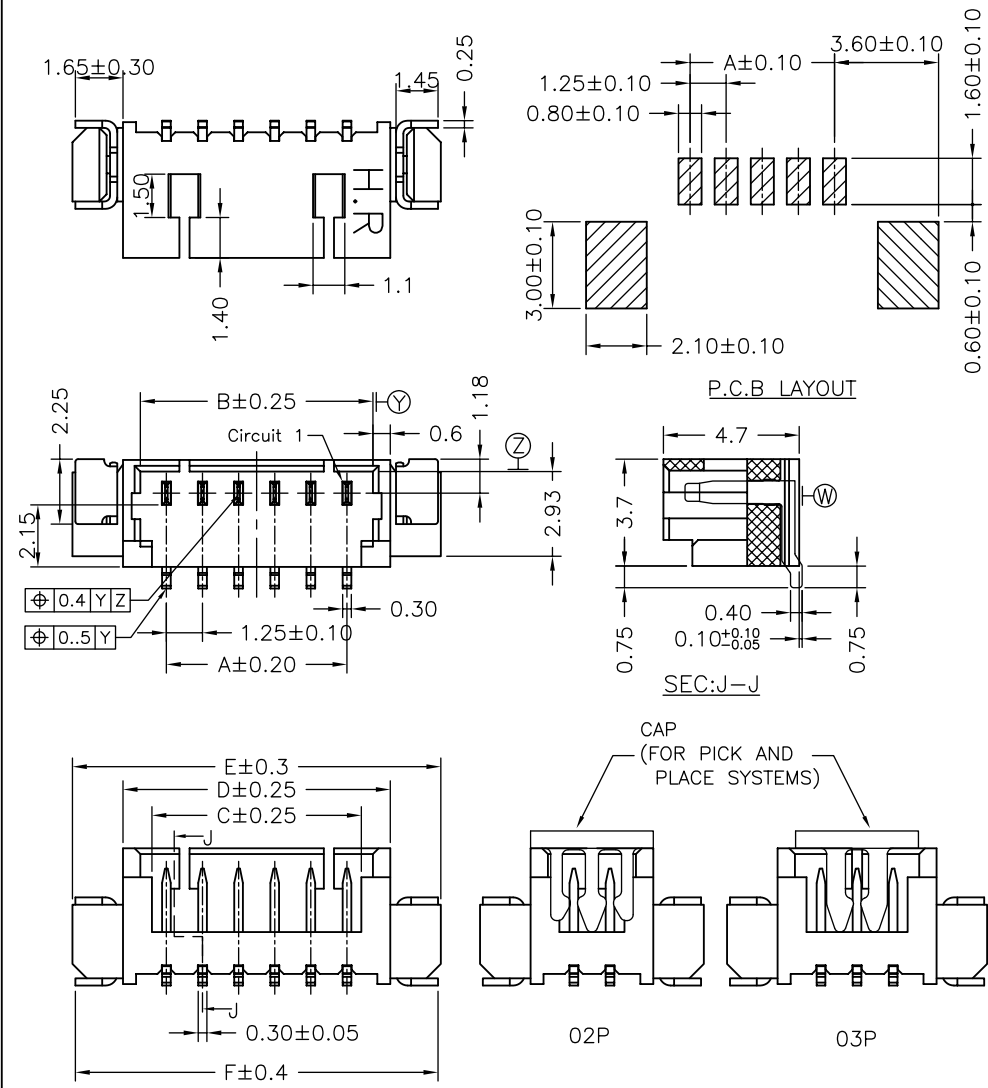


			UNIT	SCALE	SHEET	TITLE:
			mm		1 of 2	
			DRAWN BY	APPROVED BY		<b>1.25mm PITCH</b> <b>180° WAFER-SMT TYPE</b>
			歐陽小強	謝瑞清		
			2008.04.28	2008.04.28		
			GENERAL TOLERANCE			
			X. X±0.25	ANGLE±		
			X. XX±0.15			
			X. XXX±0.05			
A0	NEW RELEASE	2008.04.28				
REV.	DESCRIPTION	DATE				
			DRAW NO. : A1250WV-S-XPD20			REV. AO

### 02~08 Contacts

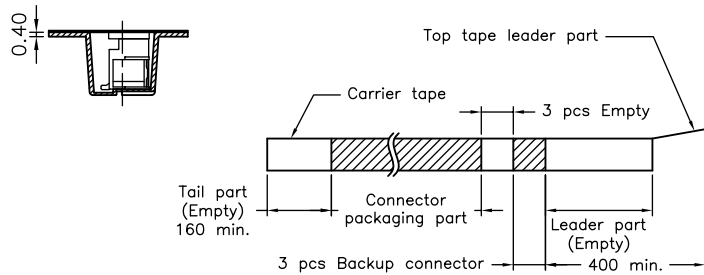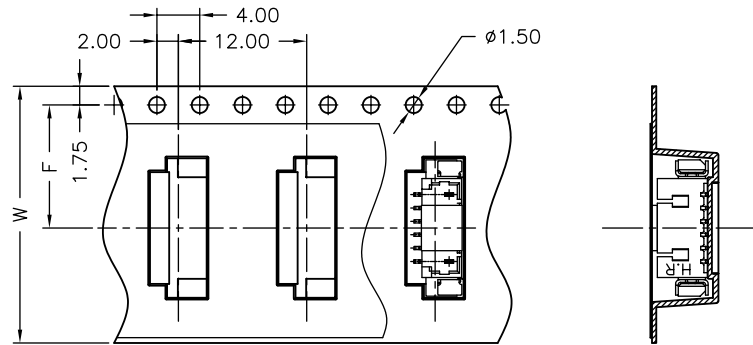

### 09~18 Contacts

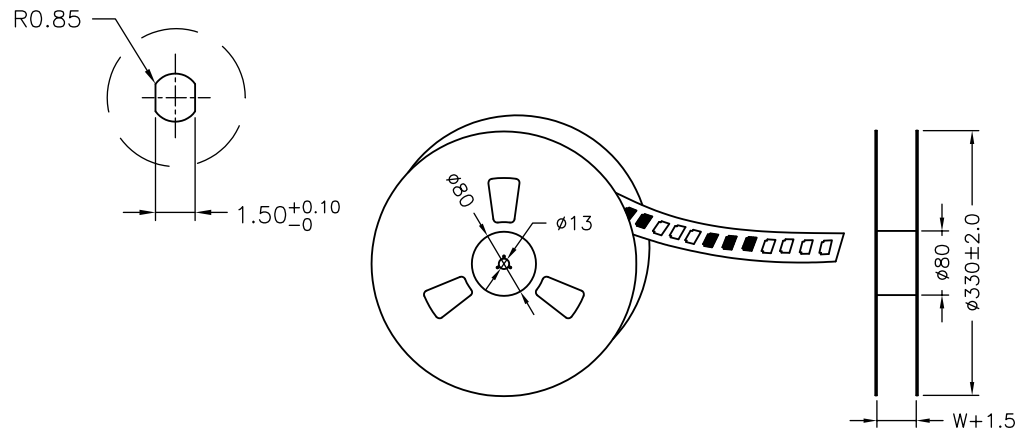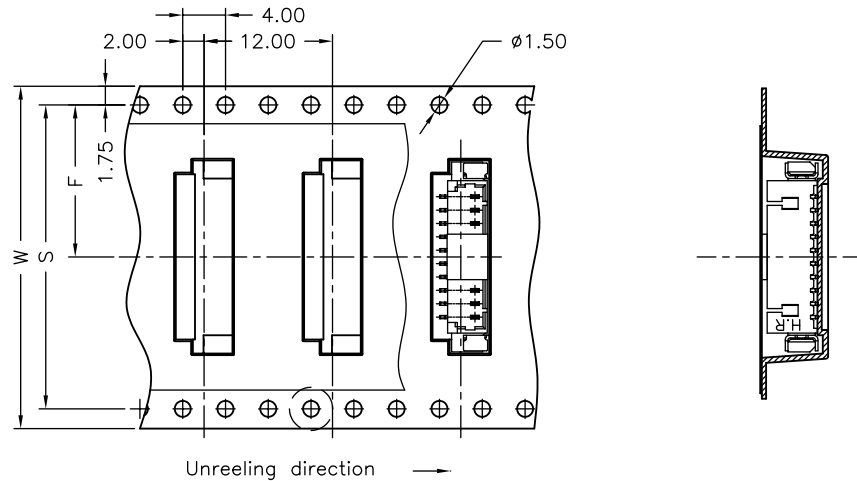

Number of Contacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel
02P	16	7.50		1,000
03P	16	7.50		1,000
04P	24	11.50		1,000
05P	24	11.50		1,000
06P	24	11.50		1,000
07P	24	11.50		1,000
08P	24	11.50		1,000
09P	24	11.50		1,000
10P	32	14.20	28.40	1,000
11P	32	14.20	28.40	1,000
12P	32	14.20	28.40	1,000
13P	32	14.20	28.40	1,000
14P	44	20.20	40.40	1,000
15P	44	20.20	40.40	1,000
16P	44	20.20	40.40	1,000
17P	44	20.20	40.40	1,000
18P	44	20.20	40.40	1,000

			UNIT	SCALE	SHEET	TITLE:
			mm		2 of 2	1.25mm PITCH 180° WAFER-SMT TYPE TAPING SPEC.
			DRAWN BY	APPROVED BY		
			歐陽小強 2008.04.28	謝瑞清 2008.04.28		
			GENERAL TOLERANCE			DRAW NO. : A1250WV-S-XPD20
			X. X±0.25	ANGLE±		
			X. XX±0.15			
A0	NEW RELEASE	2008.04.28	X. XXX±0.05			REV. AO
REV.	DESCRIPTION	DATE				