

SPECIFICATIONS



Current Rating: 1A AC,DC
 Voltage Rating: 150V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 30mΩ Max.
 Insulation Resistance: 500MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Brass/Gold-flash
 Solder Tabs: Brass/Gold-flash
 Cap: Nylon 6T,UL94V-0,Natural(Beige)
 Wafer: Nylon 6T,UL94V-0
 Color: Natural(Beige)

Ordering Information & Dimensions



PART NO.	Dimensions	
	A	B
A1252WV-SF-2X05PD01	5.00	12.50
A1252WV-SF-2X07PD01	7.50	15.00
A1252WV-SF-2X10PD01	11.25	18.75
A1252WV-SF-2X15PD01	17.50	25.00
A1252WV-SF-2X20PD01	23.75	31.25

UNIT	SCALE	SHEET	TITLE:	
mm		1 of 2	1.25mm PITCH 180° DUAL ROW WAFER- SMT TYPE	
DRAWN BY 歌陽小強 2006.08.17		APPROVED BY 董正一 2006.08.17		
GENERAL TOLERANCE				
A1	REVISE	2007.04.20	X. X±0.25	
A0	NEW RELEASE	2006.08.17	X. XX±0.15	
REV.	DESCRIPTION	DATE	X. XXX±0.05	
			DIP	
DRAW NO.:			A1252WV-SF-2XNPD01	
			REV. A1	

2X05~2X07 Contacts

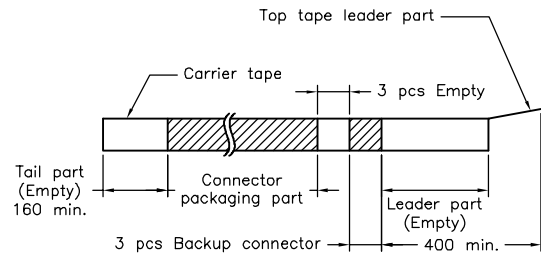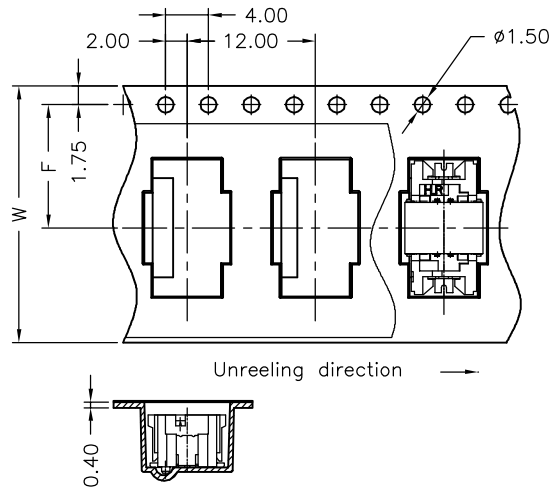

2X10~2X20 Contacts

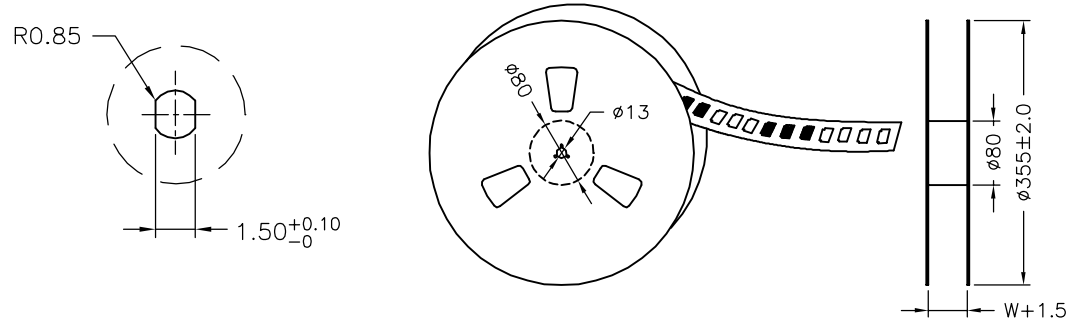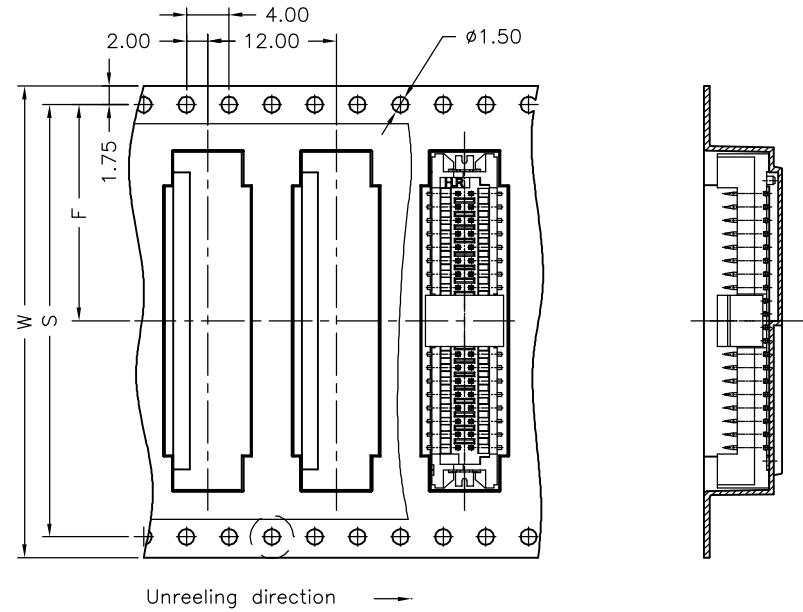

Number of Contacts	W±0.3	F±0.1	S±0.1	Q'ty/Reel
2X05P	24	11.50	/	1,000
2X07P	24	11.50		1,000
2X10P	32	14.20	28.40	1,000
2X15P	44	20.20	40.40	1,000
2X20P	44	20.20	40.40	1,000

UNIT	SCALE	SHEET	
mm		2 of 2	
DRAWN BY		APPROVED BY	
歐陽小強		董正一	
2006.08.17		2006.08.17	
GENERAL TOLERANCE			
A1	REVISE	2007.04.20	X. X±0.25
A0	NEW RELEASE	2006.08.17	X. XX±0.15
REV.	DESCRIPTION	DATE	X. XXX±0.05
			▽ ⊕
TITLE:			1.25mm PITCH 180° DUAL ROW WAFER- SMT TYPE TAPING SPEC.
DRAW NO.:			A1252WV-SF-2XNPD01
			REV. A1