

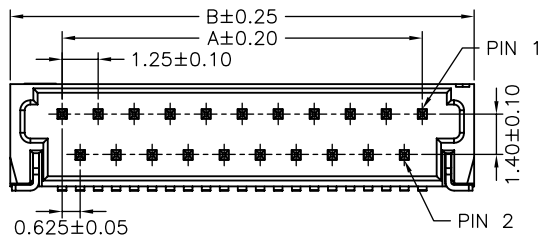
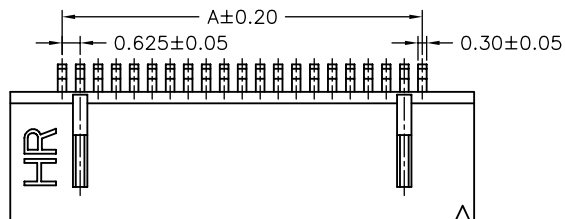
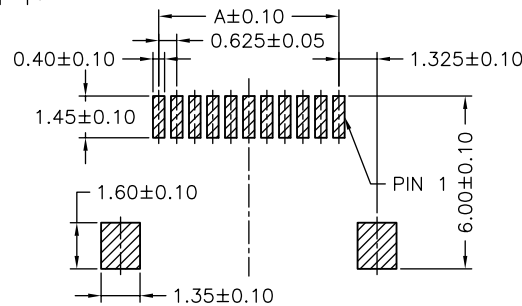



05,07,09,11 Contacts



13,15,17,19,21,31,41 Contacts

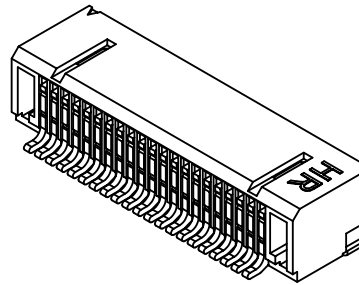

SUGGESTED PCB LAYOUT
(COMPONENT SIDE)





SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 200V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 40mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Pin Material: Phosphor Bronze/Gold-plated 3u"
 Solder Tabs: Brass/Gold-flash
 Material: Nylon 6T,UL94V-0
 Color: Natural(Black)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A1256WRA-S-05PD02	2.50	6.10
A1256WRA-S-07PD02	3.75	7.35
A1256WRA-S-09PD02	5.00	8.60
A1256WRA-S-11PD02	6.25	9.85
A1256WRA-S-13PD02	7.50	11.10
A1256WRA-S-15PD02	8.75	12.35
A1256WRA-S-17PD02	10.00	13.60
A1256WRA-S-19PD02	11.25	14.85
A1256WRA-S-21PD02	12.50	16.10
A1256WRA-S-31PD02	18.75	22.35
A1256WRA-S-41PD02	25.00	28.60

		 JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.	
		UNIT: mm	SCALE: 1 of 2
		DRAWN BY: 歐陽小強 2007.08.09	APPROVED BY: 謝瑞清 2007.08.09
		GENERAL TOLERANCE	
A1	REVISE	2008.04.14	X. X±0.25
A0	NEW RELEASE	2007.08.09	X. XX±0.15
REV.	DESCRIPTION	DATE	X. XXX±0.05
		ANGLE± 	
		TITLE: 1.25mm PITCH 90° DUAL ROW WAFER- SMT TYPE	
		DRAW NO. : A1256WRA-S-XP02	REV. A1

