


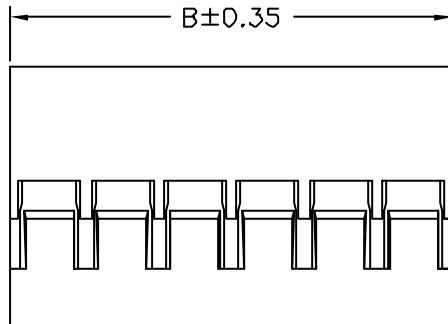


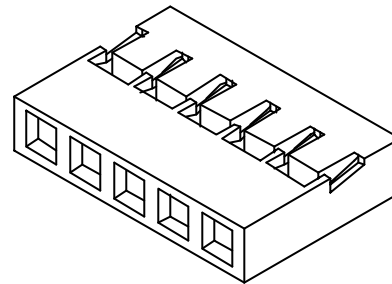

Ordering Information & Dimensions

PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B
A2015H-02P	2.00	4.20	A2015H-17P	32.00	34.20
A2015H-03P	4.00	6.20	A2015H-18P	34.00	36.20
A2015H-04P	6.00	8.20	A2015H-19P	36.00	38.20
A2015H-05P	8.00	10.20	A2015H-20P	38.00	40.20
A2015H-06P	10.00	12.20	A2015H-21P	40.00	42.20
A2015H-07P	12.00	14.20	A2015H-22P	42.00	44.20
A2015H-08P	14.00	16.20	A2015H-23P	44.00	46.20
A2015H-09P	16.00	18.20	A2015H-24P	46.00	48.20
A2015H-10P	18.00	20.20	A2015H-25P	48.00	50.20
A2015H-11P	20.00	22.20	A2015H-26P	50.00	52.20
A2015H-12P	22.00	24.20	A2015H-27P	52.00	54.20
A2015H-13P	24.00	26.20	A2015H-28P	54.00	56.20
A2015H-14P	26.00	28.20	A2015H-29P	56.00	58.20
A2015H-15P	28.00	30.20	A2015H-30P	58.00	60.20
A2015H-16P	30.00	32.20			

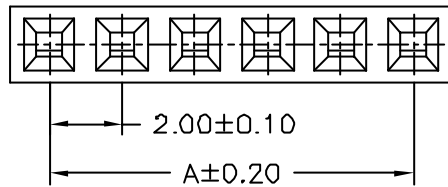

SPECIFICATIONS

Current Rating: 2A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 1000V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Black

				JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.			
UNIT	SCALE	SHEET	TITLE:				
mm		1 of 1	2.00mm PITCH SINGLE ROW HOUSING				
DRAWN BY		APPROVED BY				DRAW NO.:	
董正一 2001.02.01		董正一 2001.02.01					REV. B1
GENERAL TOLERANCE							
B1	REVISE	2006.08.30	X.X ±0.25	ANGLE ±			
B0	NEW RELEASE	2005.11.30	X.XX ±0.15				
REV.	DESCRIPTION	DATE	X.XXX ±0.05				