


Ordering Information & Dimensions

PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B
A2016H-N-2X02P-B	2.00	4.20	A2016H-N-2X14P-B	26.00	28.20
A2016H-N-2X03P-B	4.00	6.20	A2016H-N-2X15P-B	28.00	30.20
A2016H-N-2X04P-B	6.00	8.20	A2016H-N-2X16P-B	30.00	32.20
A2016H-N-2X05P-B	8.00	10.20	A2016H-N-2X17P-B	32.00	34.20
A2016H-N-2X06P-B	10.00	12.20	A2016H-N-2X18P-B	34.00	36.20
A2016H-N-2X07P-B	12.00	14.20	A2016H-N-2X19P-B	36.00	38.20
A2016H-N-2X08P-B	14.00	16.20	A2016H-N-2X20P-B	38.00	40.20
A2016H-N-2X09P-B	16.00	18.20	A2016H-N-2X21P-B	40.00	42.20
A2016H-N-2X10P-B	18.00	20.20	A2016H-N-2X22P-B	42.00	44.20
A2016H-N-2X11P-B	20.00	22.20	A2016H-N-2X23P-B	44.00	46.20
A2016H-N-2X12P-B	22.00	24.20	A2016H-N-2X24P-B	46.00	48.20
A2016H-N-2X13P-B	24.00	26.20	A2016H-N-2X25P-B	48.00	50.20

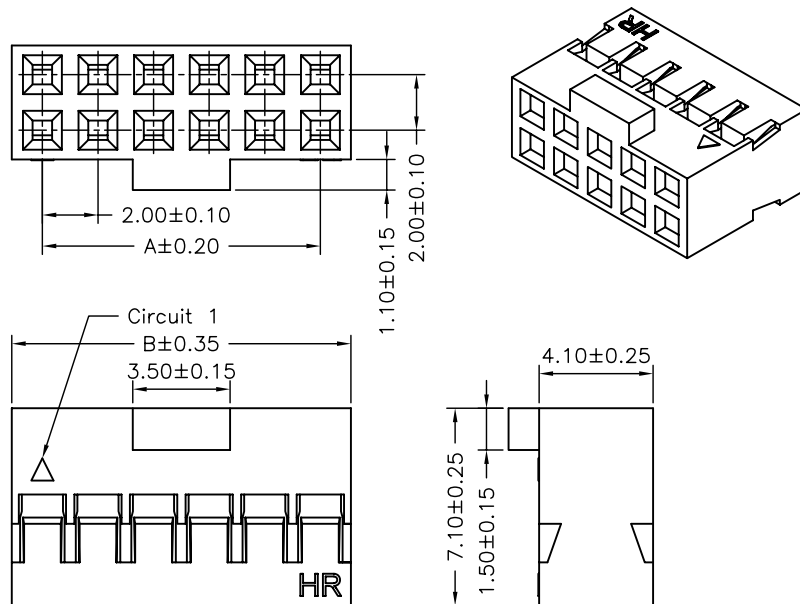

SPECIFICATIONS

Current Rating: 2A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max.  
 Insulation Resistance: 1000MΩ Min.  
 Withstanding Voltage: 1000V AC/minute  
 Material: Nylon 66,UL94V-0  
 Color: Black

				JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.	
		UNIT	SCALE	SHEET	TITLE:
		mm		1 of 1	
		DRAWN BY	APPROVED BY		2.00mm PITCH DUAL ROW HOUSING WITH NOSE
		董正一	董正一		
		2002.07.12	2002.07.12		
		GENERAL TOLERANCE			
B1	REVISE	2006.06.14	X. X±0.25	ANGLE±	DRAW NO. : A2016H-N-2XNP-B
B0	NEW RELEASE	2005.11.25	X. XX±0.15		
REV.	DESCRIPTION	DATE	X. XXX±0.05		
					REV. B1