


Ordering Information & Dimensions

PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B
A2016H-N-2X02P-C	2.00	4.20	A2016H-N-2X14P-C	26.00	28.20
A2016H-N-2X03P-C	4.00	6.20	A2016H-N-2X15P-C	28.00	30.20
A2016H-N-2X04P-C	6.00	8.20	A2016H-N-2X16P-C	30.00	32.20
A2016H-N-2X05P-C	8.00	10.20	A2016H-N-2X17P-C	32.00	34.20
A2016H-N-2X06P-C	10.00	12.20	A2016H-N-2X18P-C	34.00	36.20
A2016H-N-2X07P-C	12.00	14.20	A2016H-N-2X19P-C	36.00	38.20
A2016H-N-2X08P-C	14.00	16.20	A2016H-N-2X20P-C	38.00	40.20
A2016H-N-2X09P-C	16.00	18.20	A2016H-N-2X21P-C	40.00	42.20
A2016H-N-2X10P-C	18.00	20.20	A2016H-N-2X22P-C	42.00	44.20
A2016H-N-2X11P-C	20.00	22.20	A2016H-N-2X23P-C	44.00	46.20
A2016H-N-2X12P-C	22.00	24.20	A2016H-N-2X24P-C	46.00	48.20
A2016H-N-2X13P-C	24.00	26.20	A2016H-N-2X25P-C	48.00	50.20

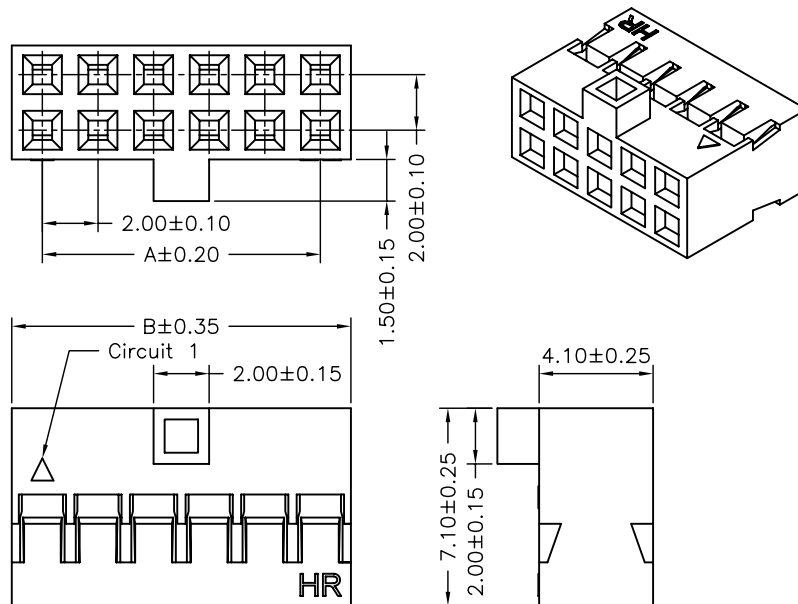

SPECIFICATIONS

Current Rating: 2A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 1000MΩ Min.
 Withstanding Voltage: 1000V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Black

				JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.	
		UNIT	SCALE	SHEET	TITLE:
		mm		1 of 1	
		DRAWN BY	APPROVED BY		
		董正一	董正一		
		2002.07.12	2002.07.12		
		GENERAL TOLERANCE			
B1	REVISE	2006.06.14	X.X±0.25	ANGLE±	
B0	NEW RELEASE	2005.11.25	X.XX±0.15		
REV.	DESCRIPTION	DATE	X.XXX±0.05		DRAW NO. : A2016H-N-2XNP-C
					REV. B1