
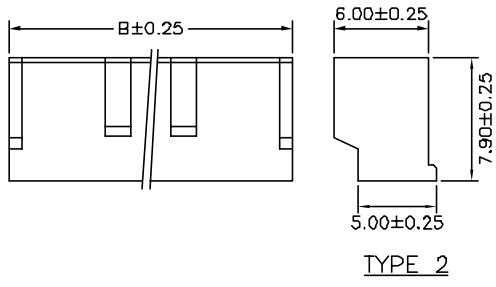

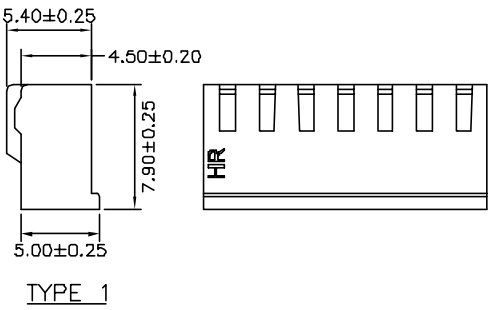
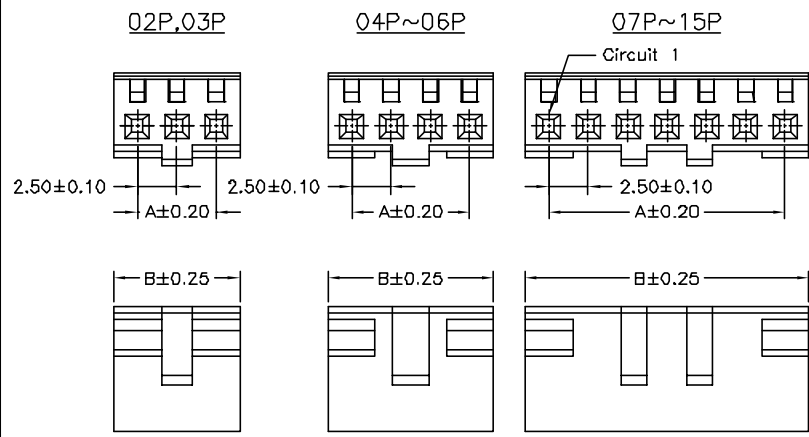


SPECIFICATIONS
 Current Rating: 3A AC,DC
 Voltage Rating: 500V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-0
 Pantone Color: 153C



Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A2500H-02P	2.50	5.50
A2500H-03P	5.00	8.00
A2500H-04P	7.50	10.50
A2500H-05P	10.00	13.00
A2500H-06P	12.50	15.50
A2500H-07P	15.00	18.00
A2500H-08P	17.50	20.50
A2500H-09P	20.00	23.00
A2500H-10P	22.50	25.50
A2500H-11P	25.00	28.00
A2500H-12P	27.50	30.50
A2500H-13P	30.00	33.00
A2500H-14P	32.50	35.50
A2500H-15P	35.00	38.00

Ordering Information:

A2500H-XP - *
 1 2

- 1.Part No.
- 2.Style:
 - 1-Type 1
 - 2-Type 2

		UNIT	SCALE	SHEET	TITLE:
		mm		1 of 1	
DRAWN BY		APPROVED BY		2.50mm PITCH HOUSING	
董正一		董正一			
2001.02.01		2001.02.01			
GENERAL TOLERANCE					
B1	REVISE	2008.05.23	X.X ±0.25	ANGLE ±	DRAW NO.: A2500H-XP-X
B0	NEW RELEASE	2006.02.21	X.XX ±0.15		
REV.	DESCRIPTION	DATE	X.XXX ±0.05		
					REV. B1