











02P,03P



04P~06P



07P~15P

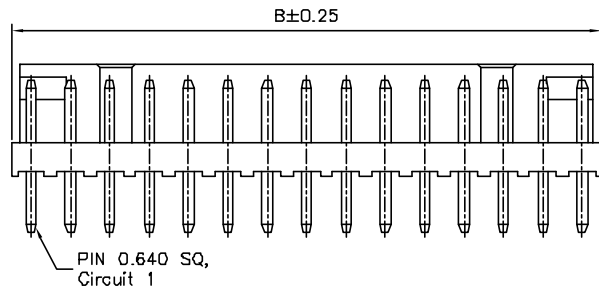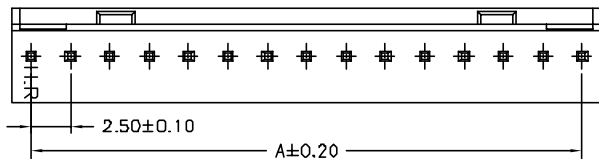


SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 500V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 100MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-0
 Pantone Color: 153C

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A2500WV-02P	2.50	5.00
A2500WV-03P	5.00	7.50
A2500WV-04P	7.50	10.00
A2500WV-05P	10.00	12.50
A2500WV-06P	12.50	15.00
A2500WV-07P	15.00	17.50
A2500WV-08P	17.50	20.00
A2500WV-09P	20.00	22.50
A2500WV-10P	22.50	25.00
A2500WV-11P	25.00	27.50
A2500WV-12P	27.50	30.00
A2500WV-13P	30.00	32.50
A2500WV-14P	32.50	35.00
A2500WV-15P	35.00	37.50

		 JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.	
UNIT	SCALE	SHEET	TITLE:
mm		1 of 1	
DRAWN BY	APPROVED BY	2.50mm PITCH 180° WAFER	
董正一	董正一		
2001.02.01	2001.02.01	DRAW NO. : A2500WV-XP	
GENERAL TOLERANCE			
B1	REVISE	2008.05.23	X.X ±0.25
B0	NEW RELEASE	2006.02.21	X.XX ±0.15
REV.	DESCRIPTION	DATE	X.XXX ±0.05