
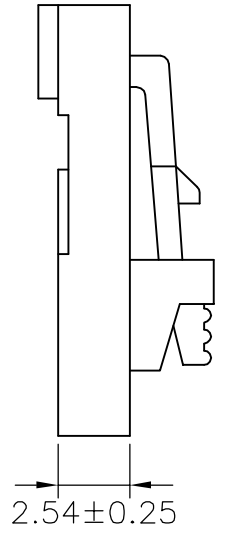
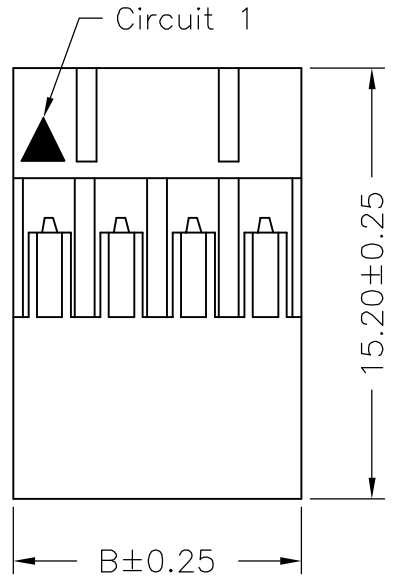


**SPECIFICATIONS**  
 Current Rating: 3A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Material: PBT30%GF,UL94V-0  
 Color: Natural(Black)

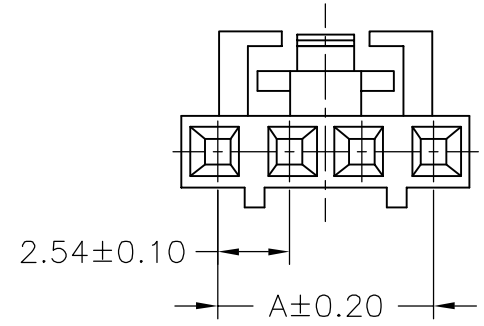

**Ordering Information & Dimensions**

PART NO.	Dimensions	
	A	B
A2541H-02P	2.54	5.08
A2541H-03P	5.08	7.62
A2541H-04P	7.62	10.16
A2541H-05P	10.16	12.70
A2541H-06P	12.70	15.24
A2541H-07P	15.24	17.78
A2541H-08P	17.78	20.32
A2541H-09P	20.32	22.86
A2541H-10P	22.86	25.40
A2541H-11P	25.40	27.94
A2541H-12P	27.94	30.48

		UNIT	SCALE	SHEET	TITLE:
		mm		1 of 1	
DRAWN BY		APPROVED BY		<b>2.54mm PITCH HOUSING WITH LOCK</b>	
董正一		董正一			
2001.02.01		2001.02.01			
GENERAL TOLERANCE					
		X. X±0.25	ANGLE±		DRAW NO. : A2541H-XP
BO NEW RELEASE		X. XX±0.15			
REV.	DESCRIPTION	DATE	X. XXX±0.05		REV. BO