



03P




02P




SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Gold-flash
 Material: PBT30%GF,UL94V-0
 Color: Natural(Black)

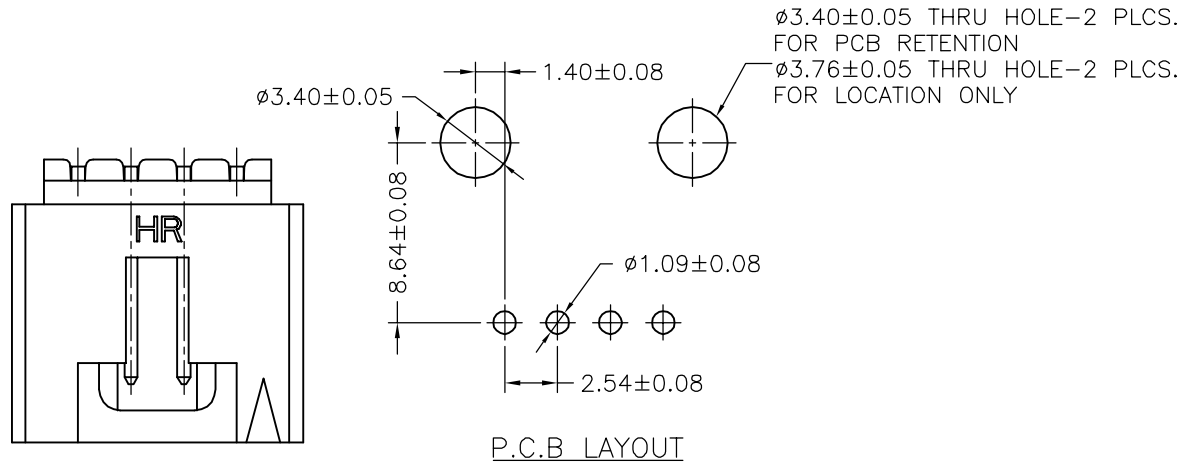

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A2541WR-F-02P	2.54	8.89
A2541WR-F-03P	5.08	11.43
A2541WR-F-04P	7.62	13.97
A2541WR-F-05P	10.16	16.51
A2541WR-F-06P	12.70	19.05
A2541WR-F-07P	15.24	21.59
A2541WR-F-08P	17.78	24.13
A2541WR-F-09P	20.32	26.67
A2541WR-F-10P	22.86	29.21
A2541WR-F-11P	25.40	31.75
A2541WR-F-12P	27.94	34.29

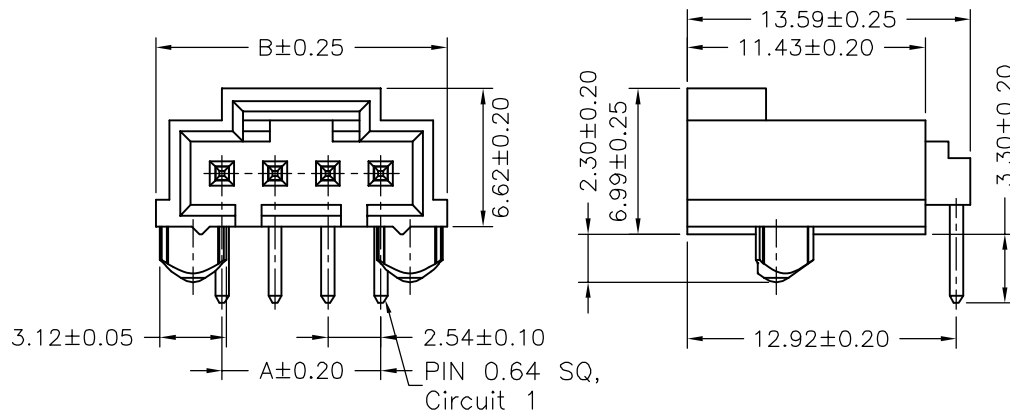

						JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.		
UNIT	SCALE	SHEET	TITLE:					
mm		1 of 1						
DRAWN BY	APPROVED BY		2.54mm PITCH 90° WAFER					
董正一	董正一							
B3 REVISE	2007.07.18	2004.12.28						2004.12.28
B2 REVISE	2006.12.19	GENERAL TOLERANCE						
B1 REVISE	2006.09.25	X.X ± 0.25						ANGLE ±
B0 NEW RELEASE	2006.04.10	X.XX ± 0.15			DRAW NO.:		REV.	
REV.	DESCRIPTION	DATE			X.XXX ± 0.05	A2541WR-F-XP		B3