


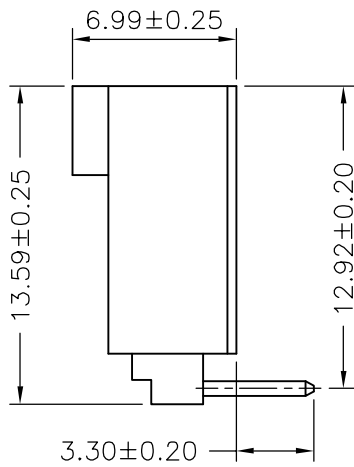



3P

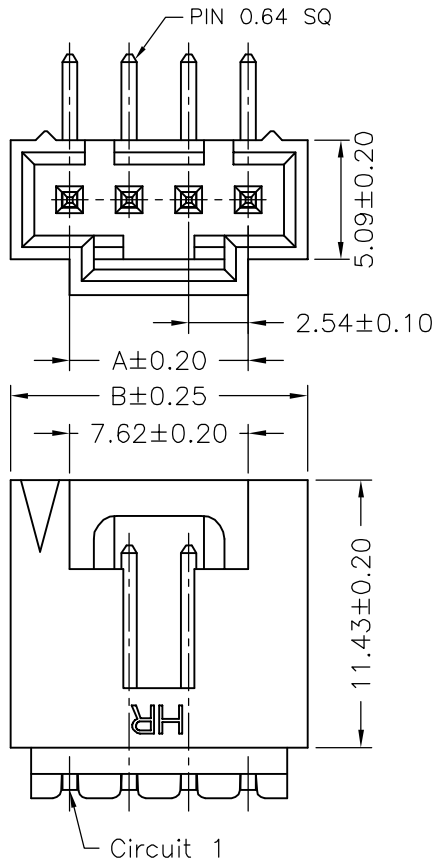

2P

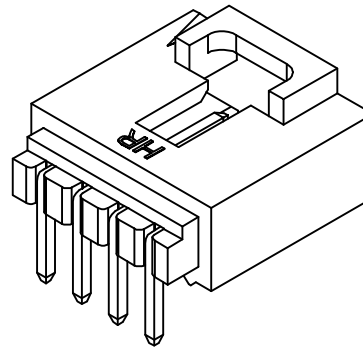

SPECIFICATIONS

Current Rating: 3A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Pin Material: Brass/Gold-flash  
 Material: PBT30%GF,UL94V-0  
 Color: Natural(Black)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A2541WR-02P	2.54	7.59
A2541WR-03P	5.08	10.13
A2541WR-04P	7.62	12.67
A2541WR-05P	10.16	15.21
A2541WR-06P	12.70	17.75
A2541WR-07P	15.24	20.29
A2541WR-08P	17.78	22.83
A2541WR-09P	20.32	25.37
A2541WR-10P	22.86	27.91
A2541WR-11P	25.40	30.45
A2541WR-12P	27.94	32.99

				UNIT	SCALE	SHEET	TITLE:
				mm		1 of 1	
		DRAWN BY	APPROVED BY	DRW NO.: A2541WR-XP      REV. BO			
		董正一	董正一				
		2001.02.01	2001.02.01				
		GENERAL TOLERANCE					
		X. X±0.25	ANGLE±				
		X. XX±0.15					
		X. XXX±0.05					
BO	NEW RELEASE	2006.04.10					
REV.	DESCRIPTION	DATE					