
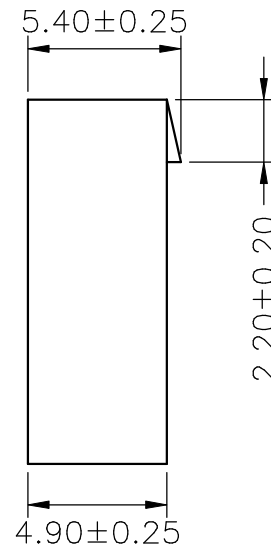
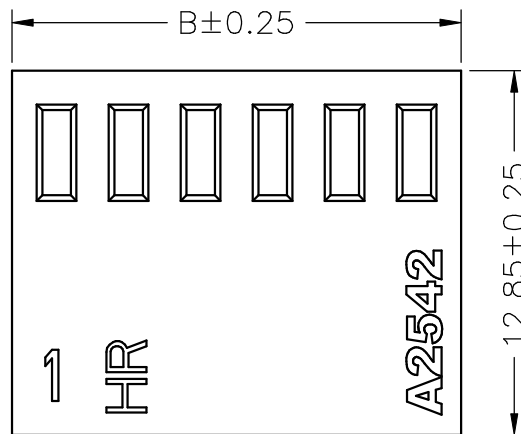
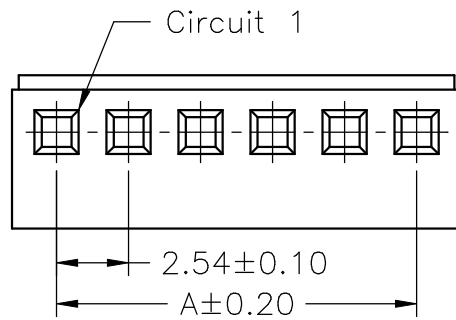


SPECIFICATIONS

Current Rating: 4A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Material: Nylon 66,UL94V-2
 Pantone Color: 1685C

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A2542HB-02P	2.54	5.68
A2542HB-03P	5.08	8.22
A2542HB-04P	7.62	10.76
A2542HB-05P	10.16	13.30
A2542HB-06P	12.70	15.84
A2542HB-07P	15.24	18.38
A2542HB-08P	17.78	20.92
A2542HB-09P	20.32	23.46
A2542HB-10P	22.86	26.00
A2542HB-11P	25.40	28.54
A2542HB-12P	27.94	31.08
A2542HB-13P	30.48	33.62
A2542HB-14P	33.02	36.16
A2542HB-15P	35.56	38.70
A2542HB-16P	38.10	41.24
A2542HB-17P	40.64	43.78
A2542HB-18P	43.18	46.32
A2542HB-19P	45.72	48.86
A2542HB-20P	48.26	51.40

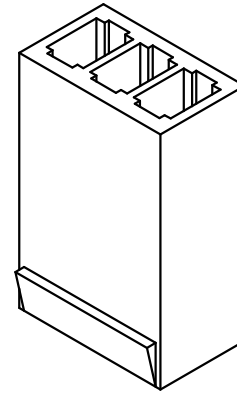

			UNIT	SCALE	SHEET
			mm		1 of 1
			DRAWN BY	APPROVED BY	
			董正一	董正一	
			2002.07.26	2002.07.26	
			GENERAL TOLERANCE		
			X. X±0.25	ANGLE±	
			X. XX±0.15		
			X. XXX±0.05		
B0	NEW RELEASE	2006.04.12	TITLE: 2.54mm PITCH HOUSING		
REV.	DESCRIPTION	DATE			
			DRAW NO. :		REV.
			A2542HB-XP		B0