
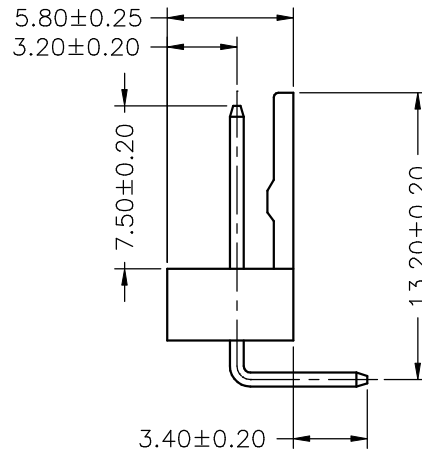
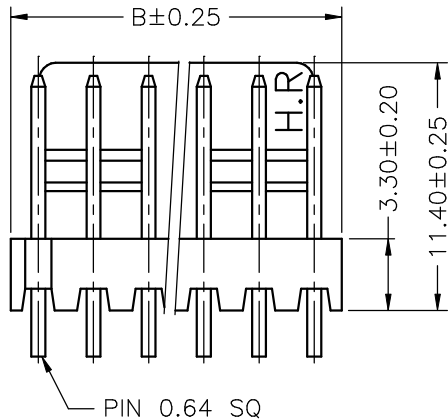


P.C.B LAYOUT



TYPE 1

SPECIFICATIONS

Current Rating: 4A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-2
 Pantone Color: 7506C

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A2542WR-02P1	2.54	5.08
A2542WR-03P1	5.08	7.62
A2542WR-04P1	7.62	10.16
A2542WR-05P1	10.16	12.70
A2542WR-06P1	12.70	15.24
A2542WR-07P1	15.24	17.78
A2542WR-08P1	17.78	20.32
A2542WR-09P1	20.32	22.86
A2542WR-10P1	22.86	25.40
A2542WR-11P1	25.40	27.94
A2542WR-12P1	27.94	30.48
A2542WR-13P1	30.48	33.02
A2542WR-14P1	33.02	35.56
A2542WR-15P1	35.56	38.10
A2542WR-16P1	38.10	40.64
A2542WR-17P1	40.64	43.18
A2542WR-18P1	43.18	45.72
A2542WR-19P1	45.72	48.26
A2542WR-20P1	48.26	50.80

UNIT	SCALE	SHEET	TITLE:
mm		1 of 1	2.54mm PITCH 90° WAFER
DRAWN BY 李勤 2006.04.12	APPROVED BY 董正一 2006.04.12		
GENERAL TOLERANCE			DRAW NO. : A2542WR-XP1
A0	NEW RELEASE	2006.04.12	
REV.	DESCRIPTION	DATE	