
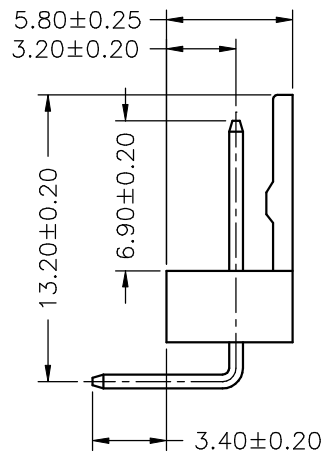


SPECIFICATIONS
 Current Rating: 4A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-2
 Pantone Color: 7506C

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A2542WR-02P2	2.54	5.08
A2542WR-03P2	5.08	7.62
A2542WR-04P2	7.62	10.16
A2542WR-05P2	10.16	12.70
A2542WR-06P2	12.70	15.24
A2542WR-07P2	15.24	17.78
A2542WR-08P2	17.78	20.32
A2542WR-09P2	20.32	22.86
A2542WR-10P2	22.86	25.40
A2542WR-11P2	25.40	27.94
A2542WR-12P2	27.94	30.48
A2542WR-13P2	30.48	33.02
A2542WR-14P2	33.02	35.56
A2542WR-15P2	35.56	38.10
A2542WR-16P2	38.10	40.64
A2542WR-17P2	40.64	43.18
A2542WR-18P2	43.18	45.72
A2542WR-19P2	45.72	48.26
A2542WR-20P2	48.26	50.80

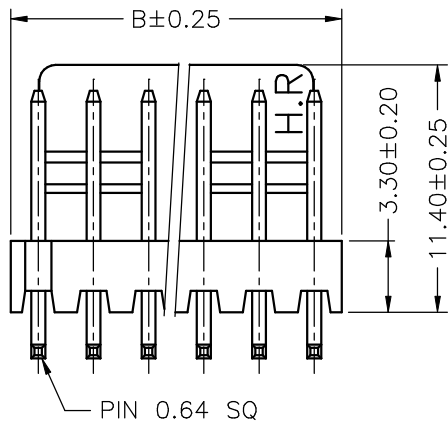

TYPE 2

UNIT	SCALE	SHEET	TITLE:	
mm		1 of 1	2.54mm PITCH 90° WAFER	
DRAWN BY 李勤 2006.04.12	APPROVED BY 董正一 2006.04.12			
GENERAL TOLERANCE			DRAW NO. : A2542WR-XP2	
A0	NEW RELEASE	2006.04.12		REV. A0
REV.	DESCRIPTION	DATE		