



Ordering Information & Dimensions

PART NO.	Dimensions		PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B		A	B
A2545H-N-02P	2.54	5.08	A2545H-N-15P	35.56	38.10	A2545H-N-28P	68.58	71.12
A2545H-N-03P	5.08	7.62	A2545H-N-16P	38.10	40.64	A2545H-N-29P	71.12	73.66
A2545H-N-04P	7.62	10.16	A2545H-N-17P	40.64	43.18	A2545H-N-30P	73.66	76.20
A2545H-N-05P	10.16	12.70	A2545H-N-18P	43.18	45.72	A2545H-N-31P	76.20	78.74
A2545H-N-06P	12.70	15.24	A2545H-N-19P	45.72	48.26	A2545H-N-32P	78.74	81.28
A2545H-N-07P	15.24	17.78	A2545H-N-20P	48.26	50.80	A2545H-N-33P	81.28	83.82
A2545H-N-08P	17.78	20.32	A2545H-N-21P	50.80	53.34	A2545H-N-34P	83.82	86.36
A2545H-N-09P	20.32	22.86	A2545H-N-22P	53.34	55.88	A2545H-N-35P	86.36	88.90
A2545H-N-10P	22.86	25.40	A2545H-N-23P	55.88	58.42	A2545H-N-36P	88.90	91.44
A2545H-N-11P	25.40	27.94	A2545H-N-24P	58.42	60.96	A2545H-N-37P	91.44	93.98
A2545H-N-12P	27.94	30.48	A2545H-N-25P	60.96	63.50	A2545H-N-38P	93.98	96.52
A2545H-N-13P	30.48	33.02	A2545H-N-26P	63.50	66.04	A2545H-N-39P	96.52	99.06
A2545H-N-14P	33.02	35.56	A2545H-N-27P	66.04	68.58	A2545H-N-40P	99.06	101.60

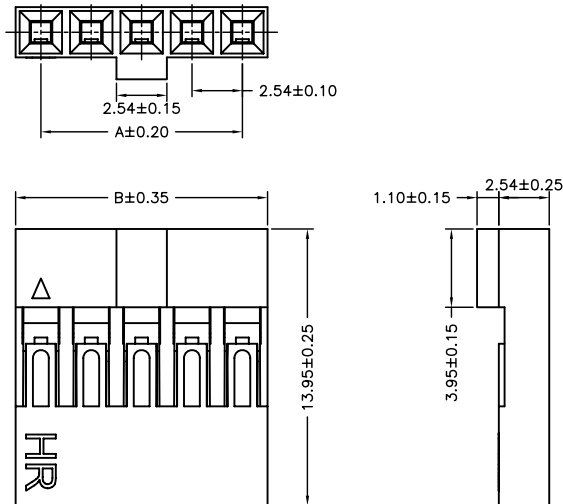

SPECIFICATIONS

Current Rating: 3A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 20mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Material: PBT,UL94V-0  
 Color: Natural(Black)

				UNIT	SCALE	SHEET	TITLE:	
				mm		1 of 1		2.54mm PITCH SINGLE ROW HOUSING WITH NOSE
		DRAWN BY	APPROVED BY					
		董正一	董正一					
B3	REVISE	2006.08.08	2003.01.24					
B2	REVISE	2006.05.29	GENERAL TOLERANCE					
B1	REVISE	2006.04.29	X.X±0.25	ANGLE±				
B0	NEW RELEASE	2006.02.20	X.XX±0.15					
REV.	DESCRIPTION	DATE	X.XXX±0.05					
							DRAW NO. :	REV.
							A2545H-N-XP	B3