


Ordering Information & Dimensions

| PART NO. | Dimensions | | PART NO. | Dimensions | | PART NO. | Dimensions | |
|-------------|------------|-------|-------------|------------|-------|-------------|------------|--------|
| | A | B | | A | B | | A | B |
| A2545WV-02P | 2.54 | 5.08 | A2545WV-15P | 35.56 | 38.10 | A2545WV-28P | 68.58 | 71.12 |
| A2545WV-03P | 5.08 | 7.62 | A2545WV-16P | 38.10 | 40.64 | A2545WV-29P | 71.12 | 73.66 |
| A2545WV-04P | 7.62 | 10.16 | A2545WV-17P | 40.64 | 43.18 | A2545WV-30P | 73.66 | 76.20 |
| A2545WV-05P | 10.16 | 12.70 | A2545WV-18P | 43.18 | 45.72 | A2545WV-31P | 76.20 | 78.74 |
| A2545WV-06P | 12.70 | 15.24 | A2545WV-19P | 45.72 | 48.26 | A2545WV-32P | 78.74 | 81.28 |
| A2545WV-07P | 15.24 | 17.78 | A2545WV-20P | 48.26 | 50.80 | A2545WV-33P | 81.28 | 83.82 |
| A2545WV-08P | 17.78 | 20.32 | A2545WV-21P | 50.80 | 53.34 | A2545WV-34P | 83.82 | 86.36 |
| A2545WV-09P | 20.32 | 22.86 | A2545WV-22P | 53.34 | 55.88 | A2545WV-35P | 86.36 | 88.90 |
| A2545WV-10P | 22.86 | 25.40 | A2545WV-23P | 55.88 | 58.42 | A2545WV-36P | 88.90 | 91.44 |
| A2545WV-11P | 25.40 | 27.94 | A2545WV-24P | 58.42 | 60.96 | A2545WV-37P | 91.44 | 93.98 |
| A2545WV-12P | 27.94 | 30.48 | A2545WV-25P | 60.96 | 63.50 | A2545WV-38P | 93.98 | 96.52 |
| A2545WV-13P | 30.48 | 33.02 | A2545WV-26P | 63.50 | 66.04 | A2545WV-39P | 96.52 | 99.06 |
| A2545WV-14P | 33.02 | 35.56 | A2545WV-27P | 66.04 | 68.58 | A2545WV-40P | 99.06 | 101.60 |

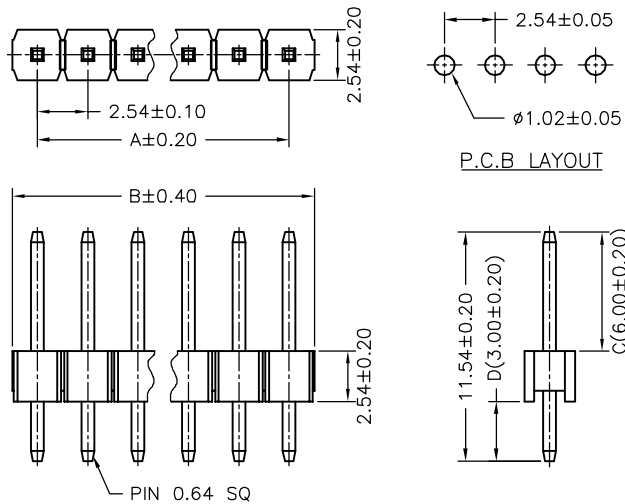

Optional Dim. available but MOQ requested

SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Gold-flash 1u" over Nickel-plated 30~50u"
 Material: PBT30%GF,UL94V-0
 Color: Natural(Black)

| | | | | | |
|------|-------------|-------------------|-------------------|--|---|
| | | | | JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD. | |
| | | UNIT | SCALE | SHEET | TITLE: |
| | | mm | | 1 of 1 | 2.54mm PITCH 180° SINGLE ROW PIN HEADER |
| | | DRAWN BY | APPROVED BY | | |
| | | 董正一 2001.02.01 | 董正一 2001.02.01 | | |
| B2 | REVISE | 2007.11.09 | GENERAL TOLERANCE | | DRAW NO.: A2545WV-XP |
| B1 | REVISE | 2006.04.29 | X.X±0.25 | ANGLE± | |
| B0 | NEW RELEASE | 2006.02.20 | X.XX±0.15 | | |
| REV. | DESCRIPTION | DATE | X.XXX±0.05 | | |
| | | | | | REV. B2 |