
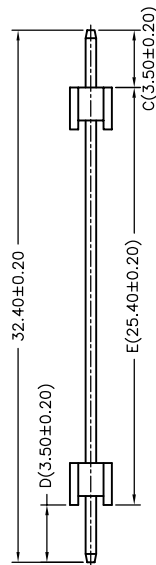
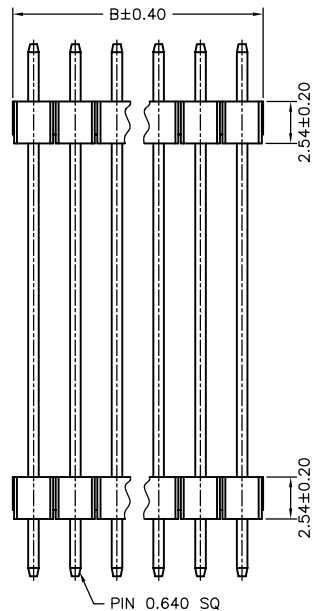



Ordering Information & Dimensions

PART NO.	Dimensions		PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B		A	B
A2545WVA-02PY03	2.54	5.08	A2545WVA-15PY03	35.56	38.10	A2545WVA-28PY03	68.58	71.12
A2545WVA-03PY03	5.08	7.62	A2545WVA-16PY03	38.10	40.64	A2545WVA-29PY03	71.12	73.66
A2545WVA-04PY03	7.62	10.16	A2545WVA-17PY03	40.64	43.18	A2545WVA-30PY03	73.66	76.20
A2545WVA-05PY03	10.16	12.70	A2545WVA-18PY03	43.18	45.72	A2545WVA-31PY03	76.20	78.74
A2545WVA-06PY03	12.70	15.24	A2545WVA-19PY03	45.72	48.26	A2545WVA-32PY03	78.74	81.28
A2545WVA-07PY03	15.24	17.78	A2545WVA-20PY03	48.26	50.80	A2545WVA-33PY03	81.28	83.82
A2545WVA-08PY03	17.78	20.32	A2545WVA-21PY03	50.80	53.34	A2545WVA-34PY03	83.82	86.36
A2545WVA-09PY03	20.32	22.86	A2545WVA-22PY03	53.34	55.88	A2545WVA-35PY03	86.36	88.90
A2545WVA-10PY03	22.86	25.40	A2545WVA-23PY03	55.88	58.42	A2545WVA-36PY03	88.90	91.44
A2545WVA-11PY03	25.40	27.94	A2545WVA-24PY03	58.42	60.96	A2545WVA-37PY03	91.44	93.98
A2545WVA-12PY03	27.94	30.48	A2545WVA-25PY03	60.96	63.50	A2545WVA-38PY03	93.98	96.52
A2545WVA-13PY03	30.48	33.02	A2545WVA-26PY03	63.50	66.04	A2545WVA-39PY03	96.52	99.06
A2545WVA-14PY03	33.02	35.56	A2545WVA-27PY03	66.04	68.58	A2545WVA-40PY03	99.06	101.60



*Optional Dim. available but
MOQ requested*

SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Gold-flash
 Material: PBT,UL94V-0
 Color: Natural(Black)

				UNIT	SCALE	SHEET	TITLE:
				mm		1 of 1	
DRAWN BY		APPROVED BY		2.54mm PITCH 180° SINGLE ROW PIN HEADER			
張絲閏		董正一					
2008.06.10		2008.06.10					
GENERAL TOLERANCE				DRAW NO. :			
X.X±0.25		ANGLE±		A2545WVA-XPY03			
X.XX±0.15		▽					
X.XXX±0.05		◎					
REV.	DESCRIPTION	DATE		REV. A0			