
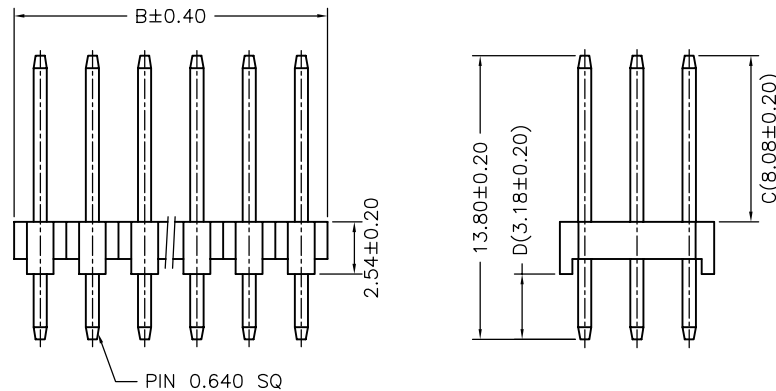


Ordering Information & Dimensions

PART NO.	Dimensions		PART NO.	Dimensions		PART NO.	Dimensions	
	A	B		A	B		A	B
A2547WV-3X02PT03	2.54	5.08	A2547WV-3X15PT03	35.56	38.10	A2547WV-3X28PT03	68.58	71.12
A2547WV-3X03PT03	5.08	7.62	A2547WV-3X16PT03	38.10	40.64	A2547WV-3X29PT03	71.12	73.66
A2547WV-3X04PT03	7.62	10.16	A2547WV-3X17PT03	40.64	43.18	A2547WV-3X30PT03	73.66	76.20
A2547WV-3X05PT03	10.16	12.70	A2547WV-3X18PT03	43.18	45.72	A2547WV-3X31PT03	76.20	78.74
A2547WV-3X06PT03	12.70	15.24	A2547WV-3X19PT03	45.72	48.26	A2547WV-3X32PT03	78.74	81.28
A2547WV-3X07PT03	15.24	17.78	A2547WV-3X20PT03	48.26	50.80	A2547WV-3X33PT03	81.28	83.82
A2547WV-3X08PT03	17.78	20.32	A2547WV-3X21PT03	50.80	53.34	A2547WV-3X34PT03	83.82	86.36
A2547WV-3X09PT03	20.32	22.86	A2547WV-3X22PT03	53.34	55.88	A2547WV-3X35PT03	86.36	88.90
A2547WV-3X10PT03	22.86	25.40	A2547WV-3X23PT03	55.88	58.42	A2547WV-3X36PT03	88.90	91.44
A2547WV-3X11PT03	25.40	27.94	A2547WV-3X24PT03	58.42	60.96	A2547WV-3X37PT03	91.44	93.98
A2547WV-3X12PT03	27.94	30.48	A2547WV-3X25PT03	60.96	63.50	A2547WV-3X38PT03	93.98	96.52
A2547WV-3X13PT03	30.48	33.02	A2547WV-3X26PT03	63.50	66.04	A2547WV-3X39PT03	96.52	99.06
A2547WV-3X14PT03	33.02	35.56	A2547WV-3X27PT03	66.04	68.58	A2547WV-3X40PT03	99.06	101.60

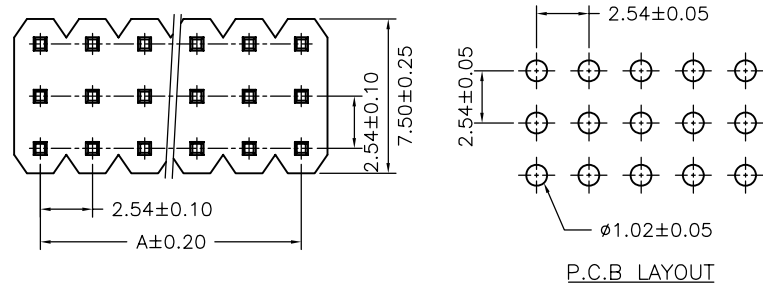

SPECIFICATIONS

Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Pin Material: Brass/Tin-plated
 Material: PBT30%GF,UL94V-0
 Color: Natural(Black)

				JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.	
UNIT	SCALE	SHEET	TITLE:		
mm		1 of 1	2.54mm PITCH 180° TRIPLE ROW PIN HEADER		
DRAWN BY	APPROVED BY				
張絲閏	董正一				
2008.05.13	2008.05.13				
GENERAL TOLERANCE					
A0	NEW RELEASE	2008.05.13	X.X±0.25	ANGLE±	DRAW NO. : A2547WV-3XNPT03
REV.	DESCRIPTION	DATE	X.XX±0.15		
			X.XXX±0.05		