


A4000WR-DS-02PD1

A4000WR-DS-02PD2

A4000WR-DS-02PD3

A4000WR-DS-03PD

A4000WR-DS-04PD

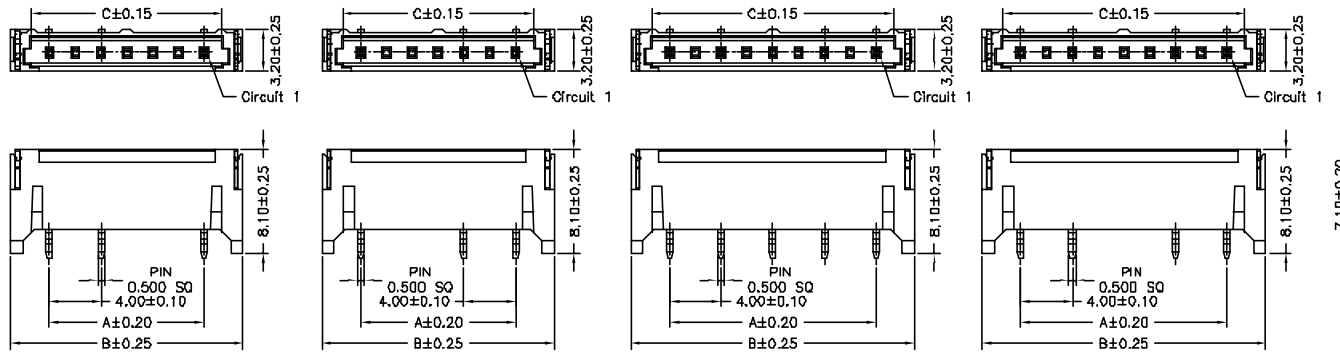

A4000WR-DS-04PDQ2

A4000WR-DS-04PDQ3

A4000WR-DS-05PD

A4000WR-DS-05PDQ3

SPECIFICATIONS

Current Rating: 1A AC,DC
 Voltage Rating: 600V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MQ Min
 Withstanding Voltage: 1800V AC/minute
 Pin Material: Brass/Gold-flash
 Solder Tabs: Brass/Gold-flash
 Material: Nylon 6T,UL94V-0
 Color: Natural(Beige)

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
A4000WR-DS-02PD1	4.00	10.00	6.80
A4000WR-DS-02PD2	8.00	14.00	10.80
A4000WR-DS-02PD3	12.00	18.00	14.80
A4000WR-DS-03PD	8.00	14.00	10.80
A4000WR-DS-04PD	12.00	18.00	14.80
A4000WR-DS-04PDQ2	12.00	18.00	14.80
A4000WR-DS-04PDQ3	12.00	18.00	14.80
A4000WR-DS-05PD	16.00	22.00	18.80
A4000WR-DS-05PDQ3	16.00	22.00	18.80

		UNIT	SCALE	SHEET	TITLE:
		mm		1 of 2	
DRAWN BY		APPROVED BY		4.00mm PITCH 90° WAFER-SMT TYPE (SQUARE PIN)	
李勤		董正一			
2006.05.17		2006.05.17			
GENERAL TOLERANCE					
X.X ±0.25		ANGLE ±		DRAW NO. : A4000WR-DS-XPDX	
X.XX ±0.15					
AO	NEW RELEASE	2006.05.17	X.XXX ±0.05	REV. A0	
REV.	DESCRIPTION	DATE			