



**SPECIFICATIONS**

Current Rating: 1A AC,DC  
 Voltage Rating: 600V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1800V AC/minute  
 Pin Material: Brass/Gold-flash  
 Solder Pin: Brass/Gold-flash  
 Material: Nylon 6T,UL94V-0  
 Color: Natural(Beige)

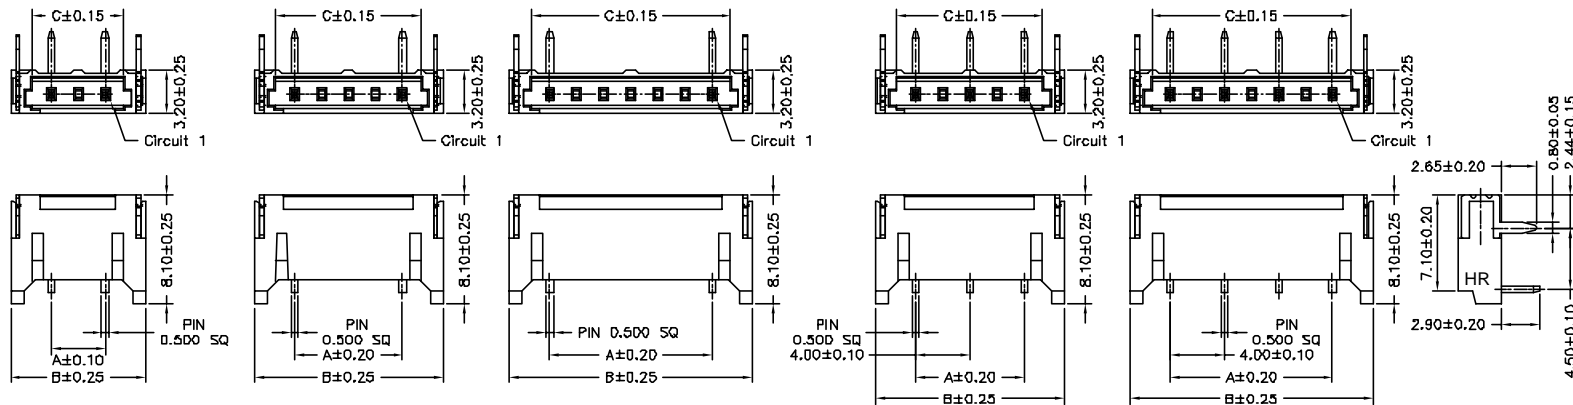

A4000WR-02PD1    A4000WR-02PD2    A4000WR-02PD3    A4000WR-03PD    A4000WR-04PD

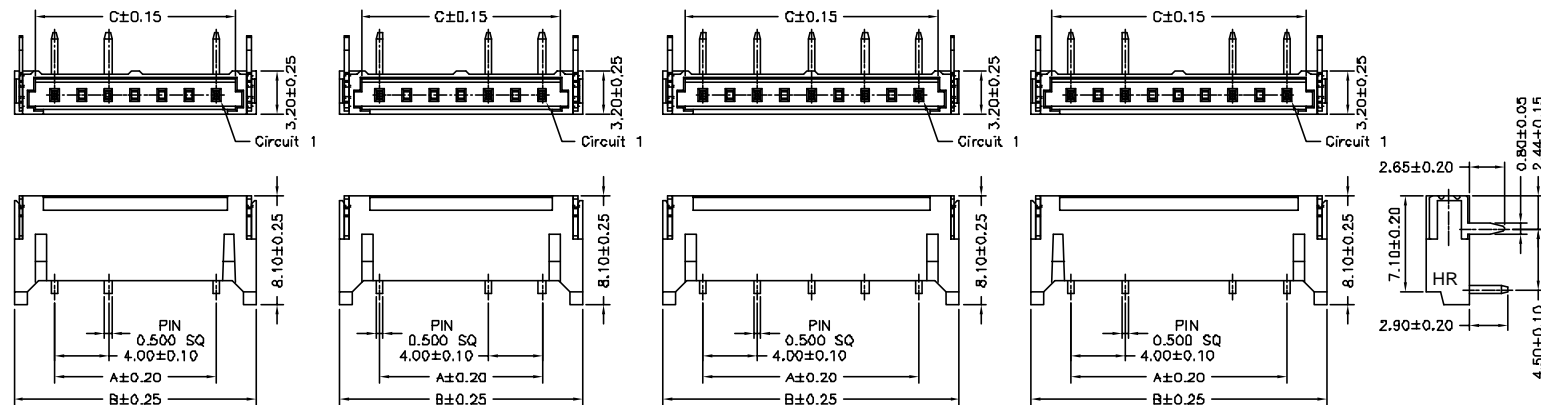


A4000WR-04PDQ2    A4000WR-04PDQ3    A4000WR-05PD    A4000WR-05PDQ3



**Ordering Information & Dimensions**

PART NO.	Dimensions		
	A	B	C
A4000WR-02PD1	4.00	10.00	6.80
A4000WR-02PD2	8.00	14.00	10.80
A4000WR-02PD3	12.00	18.00	14.80
A4000WR-03PD	8.00	14.00	10.80
A4000WR-04PD	12.00	18.00	14.80
A4000WR-04PDQ2	12.00	18.00	14.80
A4000WR-04PDQ3	12.00	18.00	14.80
A4000WR-05PD	16.00	22.00	18.80
A4000WR-05PDQ3	16.00	22.00	18.80

			UNIT	SCALE	SHEET	TITLE:	
			mm		1 of 2		
DRAWN BY		APPROVED BY		4.00mm PITCH 90° WAFER (SQUARE PIN)			
歐陽小強		謝瑞清					
2007.10.04		2007.10.04					
GENERAL TOLERANCE						DRAW NO.:	REV.:
A1	REVISE	2008.02.11	X.X±0.25	ANGLE ±	A4000WR-XPDX		
A0	NEW RELEASE	2007.10.04	X.XX±0.15				
REV.	DESCRIPTION	DATE	X.XXX±0.05				

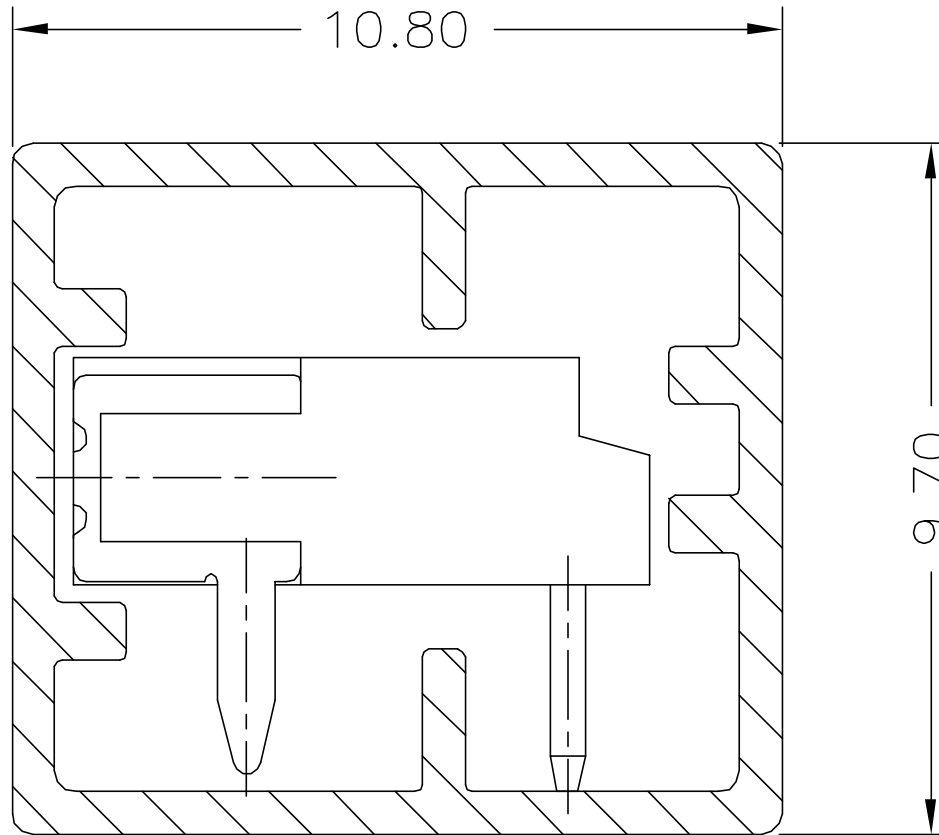

Part No.	Dimensions	Q'ty/Tube
A4000WR-02PD1	580X10.80X9.70	56
A4000WR-02PD2		40
A4000WR-02PD3		31
A4000WR-03PD		40
A4000WR-04PD		31
A4000WR-04PDQ2		31
A4000WR-04PDQ3		31
A4000WR-05PD		25
A4000WR-05PDQ3		25

			 <b>JOINT TECH ELECTRONIC IND. CO., LTD.</b> <b>JOY DAY INDUSTRIAL CO., LTD.</b>		
		UNIT	SCALE	SHEET	
		mm		2 of 2	
		DRAWN BY	APPROVED BY		
		歐陽小強	謝瑞清		
		2007.10.04	2007.10.04		
GENERAL TOLERANCE					
		X.X ±0.25	ANGLE ±		
A0	NEW RELEASE	2007.10.04	X.XX ±0.15		
REV.	DESCRIPTION	DATE	X.XXX ±0.05		
				TITLE:	
				4.00mm PITCH 90° WAFER TUBE SPEC.	
				DRAW NO.:	
				A4000WR-XPDX	
				REV. A0	