


SPECIFICATIONS

Current Rating: 7A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-2
 Color: Natural(Translucent)

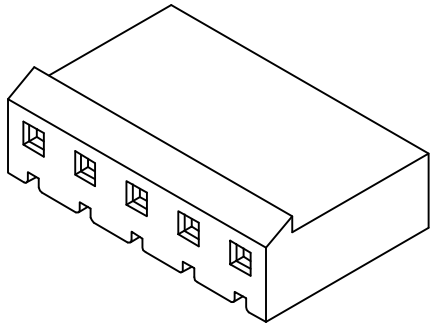

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A5081H-02P	5.08	10.08
A5081H-03P	10.16	15.16
A5081H-04P	15.24	20.24
A5081H-05P	20.32	25.32
A5081H-06P	25.40	30.40
A5081H-07P	30.48	35.48
A5081H-08P	35.56	40.56
A5081H-09P	40.64	45.64
A5081H-10P	45.72	50.72
A5081H-11P	50.80	55.80
A5081H-12P	55.88	60.88
A5081H-13P	60.96	65.96
A5081H-14P	66.04	71.04
A5081H-15P	71.12	76.12
A5081H-16P	76.20	81.20
A5081H-17P	81.28	86.28
A5081H-18P	86.36	91.36
A5081H-19P	91.44	96.44
A5081H-20P	96.52	101.52

Ordering Information:



A5081H-XP-^{*}/₂

1.Part No.


2.Style:

1-Type 1

2-Type 2

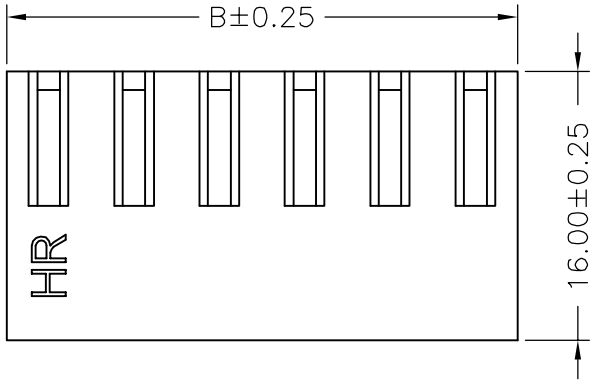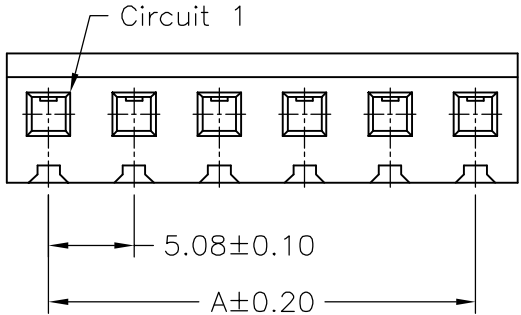


7.70±0.25



6.30±0.25

TYPE 1



6.30±0.25

TYPE 2



JOINT TECH ELECTRONIC IND. CO., LTD.
 JOY DAY INDUSTRIAL CO., LTD.

UNIT	SCALE	SHEET
mm		1 of 1
DRAWN BY	APPROVED BY	
伍建永	謝瑞清	
2005.04.23	2005.04.23	
GENERAL TOLERANCE		
X.X±0.25	ANGLE±	
X.XX±0.15	⌀	
X.XXX±0.05		

TITLE:
 5.08mm PITCH
 HOUSING

BO	NEW RELEASE	2006.01.08
REV.	DESCRIPTION	DATE

DRAW NO.:
 A5081H-XP-X

REV.
 BO