
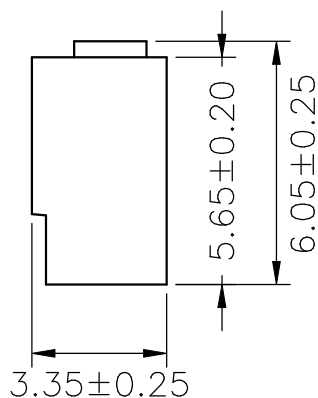
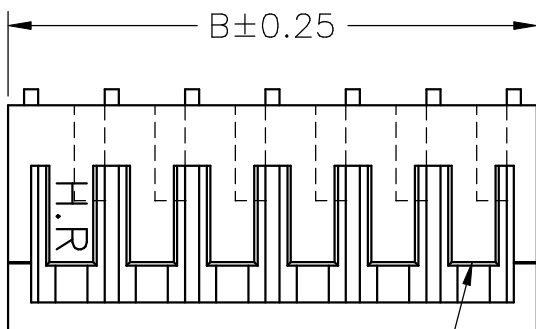



SPECIFICATIONS

Current Rating: 2A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 800V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Natural(White)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
B2011HR-02P	2.00	5.15
B2011HR-03P	4.00	7.15
B2011HR-04P	6.00	9.15
B2011HR-05P	8.00	11.15
B2011HR-06P	10.00	13.15
B2011HR-07P	12.00	15.15
B2011HR-08P	14.00	17.15
B2011HR-09P	16.00	19.15
B2011HR-10P	18.00	21.15
B2011HR-11P	20.00	23.15
B2011HR-12P	22.00	25.15
B2011HR-13P	24.00	27.15
B2011HR-14P	26.00	29.15
B2011HR-15P	28.00	31.15
B2011HR-16P	30.00	33.15

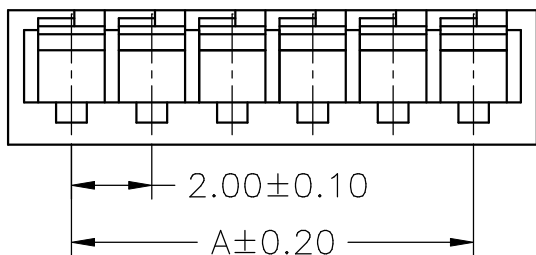

				UNIT	SCALE	SHEET	TITLE:
				mm		1 of 1	
		DRAWN BY		APPROVED BY		DRAW NO. : B2011HR-XP	
		董正一		董正一			
		2001.02.01		2001.02.01			
GENERAL TOLERANCE							
B1	REVISE	2006.04.17	X. X±0.25	ANGLE±			
B0	NEW RELEASE	2005.11.26	X. XX±0.15				
REV.	DESCRIPTION	DATE	X. XXX±0.05				