



SPECIFICATIONS


Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 800V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Natural(White)

Ordering Information & Dimensions


PART NO.	Dimensions	
	A	B
B2512HVA-02P	2.50	6.50
B2512HVA-03P	5.00	9.00
B2512HVA-04P	7.50	11.50
B2512HVA-05P	10.00	14.00
B2512HVA-06P	12.50	16.50
B2512HVA-07P	15.00	19.00
B2512HVA-08P	17.50	21.50
B2512HVA-09P	20.00	24.00
B2512HVA-10P	22.50	26.50
B2512HVA-11P	25.00	29.00
B2512HVA-12P	27.50	31.50
B2512HVA-13P	30.00	34.00
B2512HVA-14P	32.50	36.50
B2512HVA-15P	35.00	39.00
B2512HVA-16P	37.50	41.50

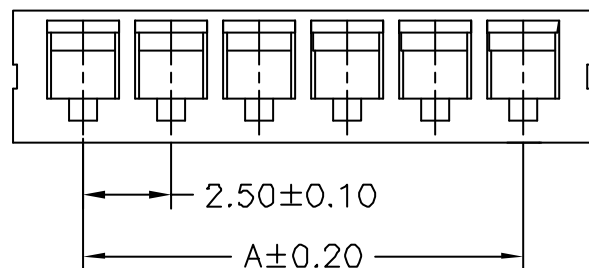

P.C.B LAYOUT

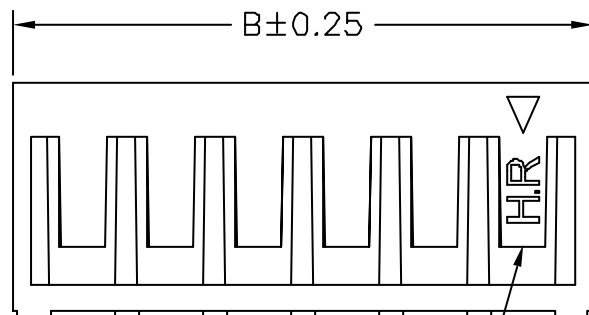

Circuit 1

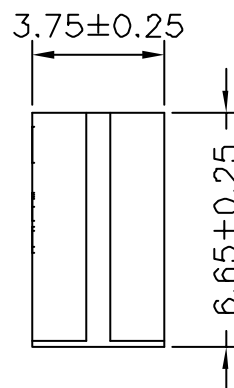

						JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.	
		UNIT	SCALE	SHEET	TITLE:		
		mm		1 of 1	2.50mm PITCH 180 HOUSING		
		DRAWN BY	APPROVED BY				
		董正一	董正一		DRAW NO.: B2512HVA-XP		
		2005.01.27	2005.01.27				
				GENERAL TOLERANCE			
B1	REVISE	2006.08.26	X.X ±0.25	ANGLE ±		REV. B1	
B0	NEW RELEASE	2005.12.06	X.XX ±0.15				
REV.	DESCRIPTION	DATE	X.XXX ±0.05				