
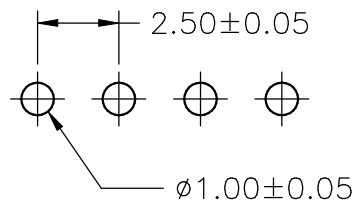


SPECIFICATIONS


Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 800V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Natural(White)

Ordering Information & Dimensions


PART NO.	Dimensions	
	A	B
B2513HV-2P	2.50	5.90
B2513HV-3P	5.00	8.40
B2513HV-4P	7.50	10.90
B2513HV-5P	10.00	13.40
B2513HV-6P	12.50	15.90
B2513HV-7P	15.00	18.40
B2513HV-8P	17.50	20.90
B2513HV-9P	20.00	23.40
B2513HV-10P	22.50	25.90
B2513HV-11P	25.00	28.40
B2513HV-12P	27.50	30.90
B2513HV-13P	30.00	33.40
B2513HV-14P	32.50	35.90
B2513HV-15P	35.00	38.40
B2513HV-16P	37.50	40.90

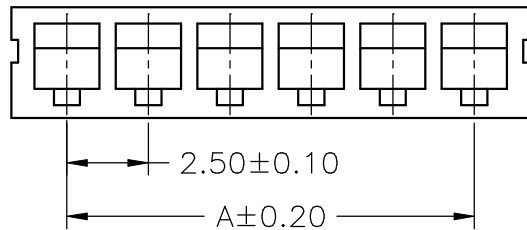

P.C.B LAYOUT

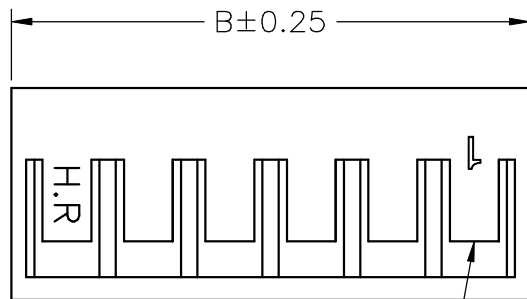

Circuit 1



UNIT	SCALE	SHEET	TITLE:	
mm		1 of 1	2.50mm PITCH 180° HOUSING	
DRAWN BY	APPROVED BY			
董正一	董正一		DRAW NO. : B2513HV-XP	
2001.02.01	2001.02.01		REV. B0	
GENERAL TOLERANCE				
		X. X±0.25	ANGLE±	
B0	NEW RELEASE	2005.12.08	X. XX±0.15	
REV.	DESCRIPTION	DATE	X. XXX±0.05	