

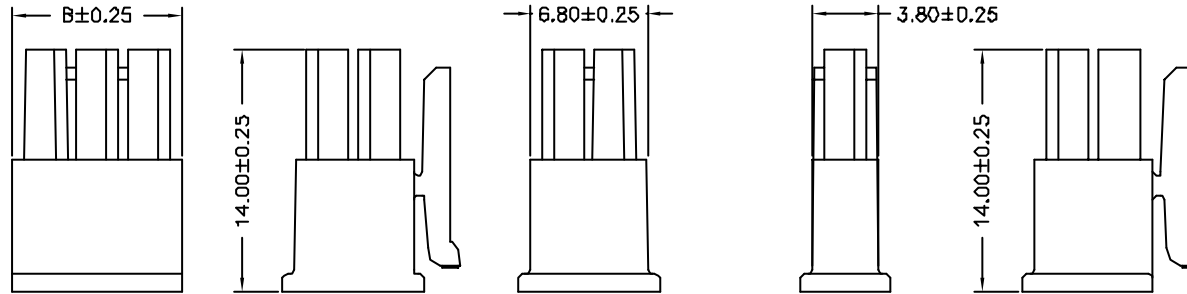


SPECIFICATIONS
 Current Rating: 5A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-2
 Color: Black

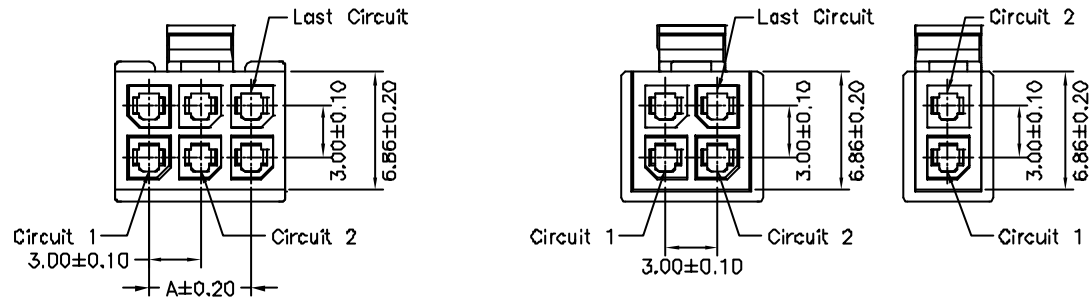

2X2P

2X1P

2X3P~2X12P

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
C3030HF-2X01P	---	3.80
C3030HF-2X02P	3.00	6.80
C3030HF-2X03P	6.00	9.80
C3030HF-2X04P	9.00	12.80
C3030HF-2X05P	12.00	15.80
C3030HF-2X06P	15.00	18.80
C3030HF-2X07P	18.00	21.80
C3030HF-2X08P	21.00	24.80
C3030HF-2X09P	24.00	27.80
C3030HF-2X10P	27.00	30.80
C3030HF-2X11P	30.00	33.80
C3030HF-2X12P	33.00	36.80

			UNIT	SCALE	SHEET	TITLE: 3.00mm PITCH HOUSING-RECEPTACLE, MICRO-FIT
			mm		1 of 1	
			DRAWN BY	APPROVED BY		
			董正一 2001.02.01	董正一 2001.02.01		
			GENERAL TOLERANCE			DRAW NO.: C3030HF-2XNP
B1	REVISE	2006.08.28	X.X ±0.25			
B0	NEW RELEASE	2005.12.14	X.XX ±0.15			
REV.	DESCRIPTION	DATE	X.XXX ±0.05			
					REV. B1	