


**SPECIFICATIONS**


Current Rating: 5A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Material: Nylon 66,UL94V-2  
 Color: Black

**Ordering Information & Dimensions**


PART NO.	Dimensions	
	A	B
C3030HMA-2X01P	---	3.85
C3030HMA-2X02P	3.00	6.85
C3030HMA-2X03P	6.00	9.85
C3030HMA-2X04P	9.00	12.85
C3030HMA-2X05P	12.00	15.85
C3030HMA-2X06P	15.00	18.85
C3030HMA-2X07P	18.00	21.85
C3030HMA-2X08P	21.00	24.85
C3030HMA-2X09P	24.00	27.85
C3030HMA-2X10P	27.00	30.85
C3030HMA-2X11P	30.00	33.85
C3030HMA-2X12P	33.00	36.85

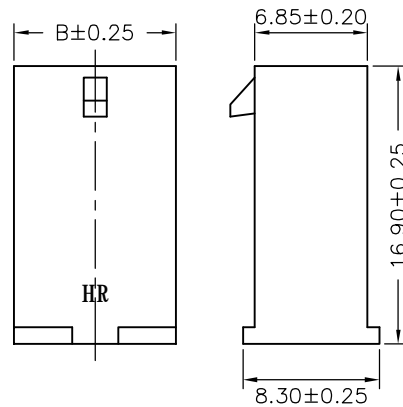

2X03P~2X12P

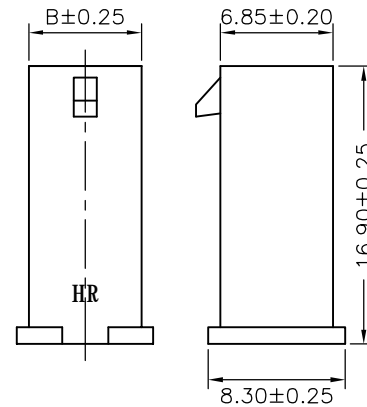

2X02P

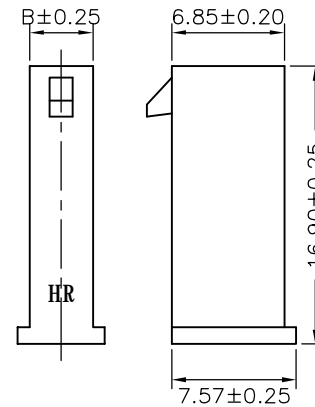

2X01P

				JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.	
UNIT	SCALE	SHEET	TITLE:		
mm		1 of 1	3.00mm PITCH HOUSING-PLUG, MICRO-FIT		
DRAWN BY	APPROVED BY				
董正一	董正一		C3030HMA-2XNP		
2005.11.23	2005.11.23		REV. B1		
GENERAL TOLERANCE					
B1	REVISE	2006.12.26	X.X±0.25	ANGLE±	
B0	NEW RELEASE	2005.12.14	X.XX±0.15		
REV.	DESCRIPTION	DATE	X.XXX±0.05		