
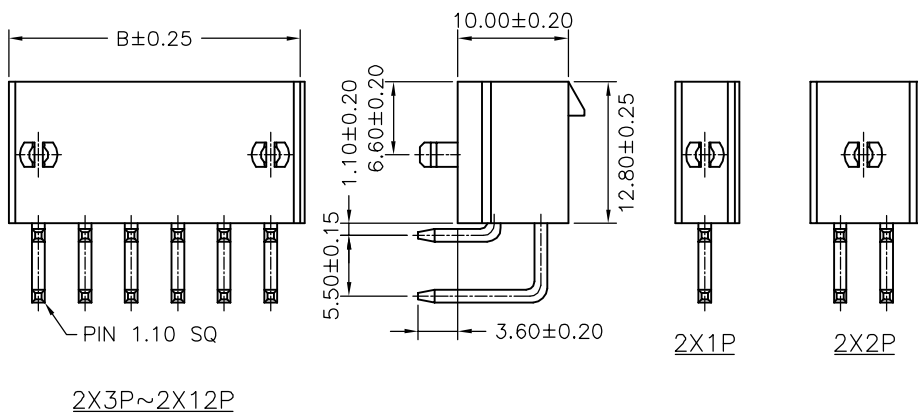


P.C.B LAYOUT

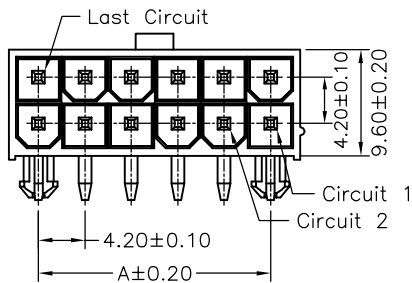

SPECIFICATIONS

Current Rating: 9A AC,DC
Voltage Rating: 600V AC,DC
Temperature Range: -25°C ~ +85°C
Contact Resistance: 10mΩ Max
Insulation Resistance: 1000MΩ Min
Withstanding Voltage: 1500V AC/minute
Pin Material: Brass/Tin-plated
Material: Nylon 66,UL94V-2
Color: Natural(Translucent)

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
C4255WR-F-2X01P	---	5.40
C4255WR-F-2X02P	4.20	9.60
C4255WR-F-2X03P	8.40	13.80
C4255WR-F-2X04P	12.60	18.00
C4255WR-F-2X05P	16.80	22.20
C4255WR-F-2X06P	21.00	26.40
C4255WR-F-2X07P	25.20	30.60
C4255WR-F-2X08P	29.40	34.80
C4255WR-F-2X09P	33.60	39.00
C4255WR-F-2X10P	37.80	43.20
C4255WR-F-2X11P	42.00	47.40
C4255WR-F-2X12P	46.20	51.60

		JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.	
UNIT	SCALE	SHEET	TITLE:
mm		1 of 1	4.20mm PITCH 90° WAFER WITH PEGS, MINI-FIT
DRAWN BY	APPROVED BY		
董正一	董正一		
2001.03.01	2001.03.01		
		GENERAL TOLERANCE	
		X. X±0.25	ANGLE±
		X. XX±0.15	
		X. XXX±0.05	
BO	NEW RELEASE	2006.06.07	DRAW NO.:
REV.	DESCRIPTION	DATE	C4255WR-F-2XNP
			REV. BO