



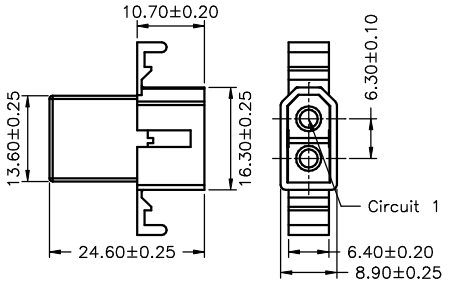


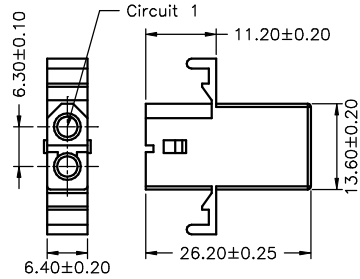

Ordering Information & Dimensions

C5030HM(A)	C5030HF(A)
 <p data-bbox="443 646 560 667">C5030HM-1P</p>	 <p data-bbox="1041 646 1153 667">C5030HF-1P</p>
 <p data-bbox="324 1053 672 1093">C5030HM-2P C5030HMA-2P (WITHOUT MOUNTING EAR)</p>	 <p data-bbox="918 1053 1265 1093">C5030HF-2P C5030HFA-2P (WITHOUT MOUNTING EAR)</p>


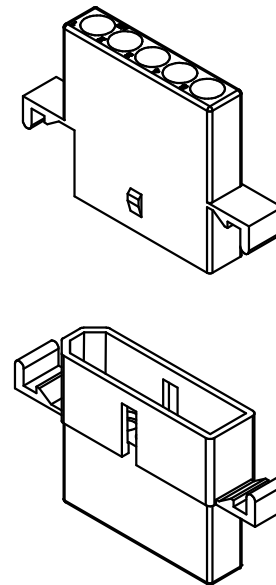


**SPECIFICATIONS**  
 Current Rating: 12A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Material: Nylon 66,UL94V-2  
 Color: Natural(Translucent)

			 <b>JOINT TECH ELECTRONIC IND. CO., LTD.</b> <b>JOY DAY INDUSTRIAL CO., LTD.</b>			
			UNIT	SCALE	SHEET	<b>TITLE:</b>  <b>5.03mm PITCH HOUSING</b>
			mm		1 of 5	
			DRAWN BY	APPROVED BY		
			蕭惠鳳	董正一		
			2002.10.02	2002.10.02		
			GENERAL TOLERANCE			
			X. X±0.25	ANGLE±		<b>DRAW NO. :</b> C5030HX(A)-XP
B0	NEW RELEASE	2006.03.08	X. XX±0.15			
REV.	DESCRIPTION	DATE	X. XXX±0.05			





### Ordering Information & Dimensions

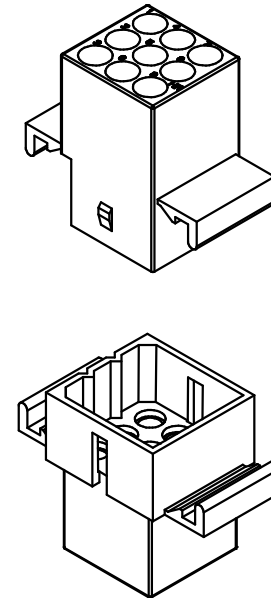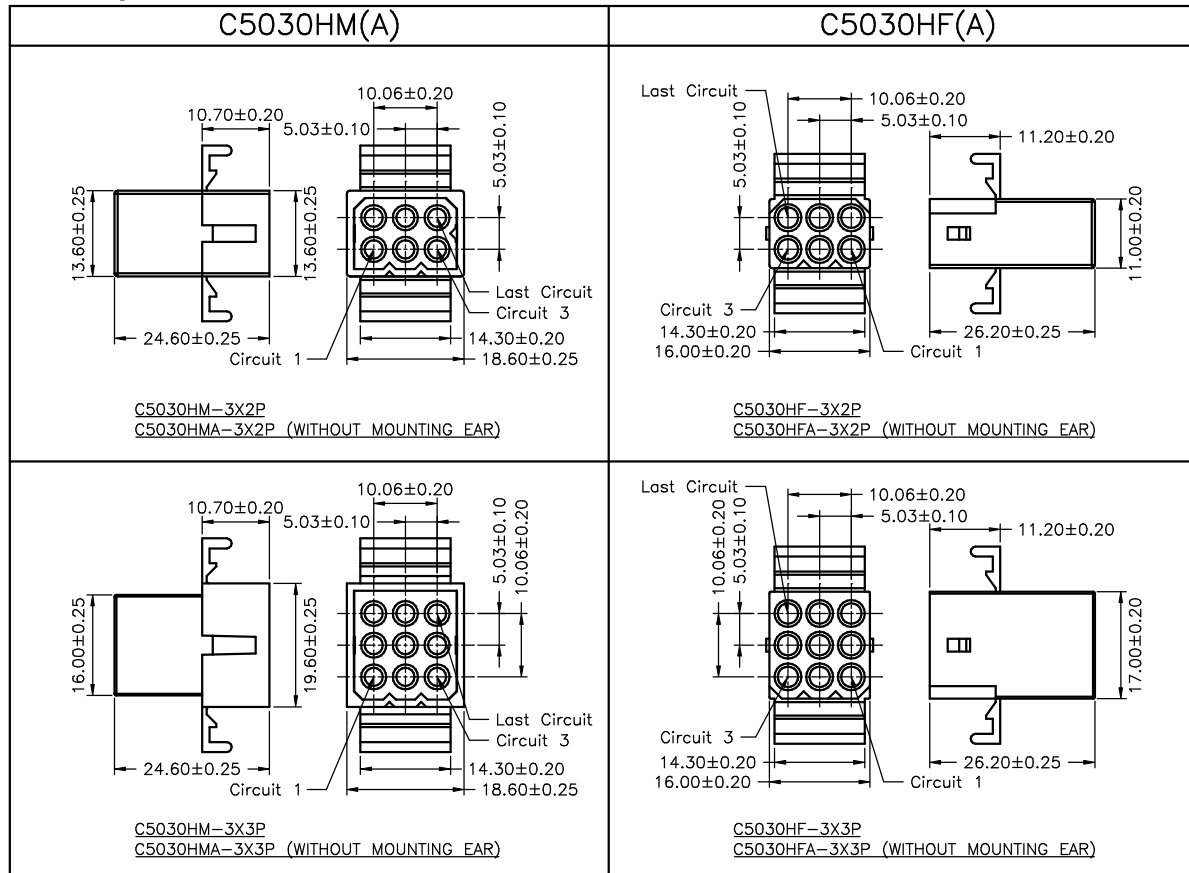

**SPECIFICATIONS**  
 Current Rating: 12A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Material: Nylon 66,UL94V-2  
 Color: Natural(Translucent)

			UNIT	SCALE	SHEET
			mm		4 of 5
			DRAWN BY	APPROVED BY	
			蕭惠鳳	董正一	
			2002.10.02	2002.10.02	
			GENERAL TOLERANCE		
			X. X±0.25	ANGLE±	
			X. XX±0.15		
			X. XXX±0.05		
B0	NEW RELEASE	2006.03.08			
REV.	DESCRIPTION	DATE			
					TITLE:
					5.03mm PITCH HOUSING
					DRAW NO. : C5030HX(A)-XP
					REV. B0

### Ordering Information & Dimensions

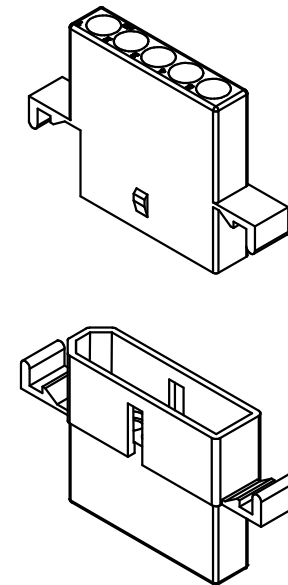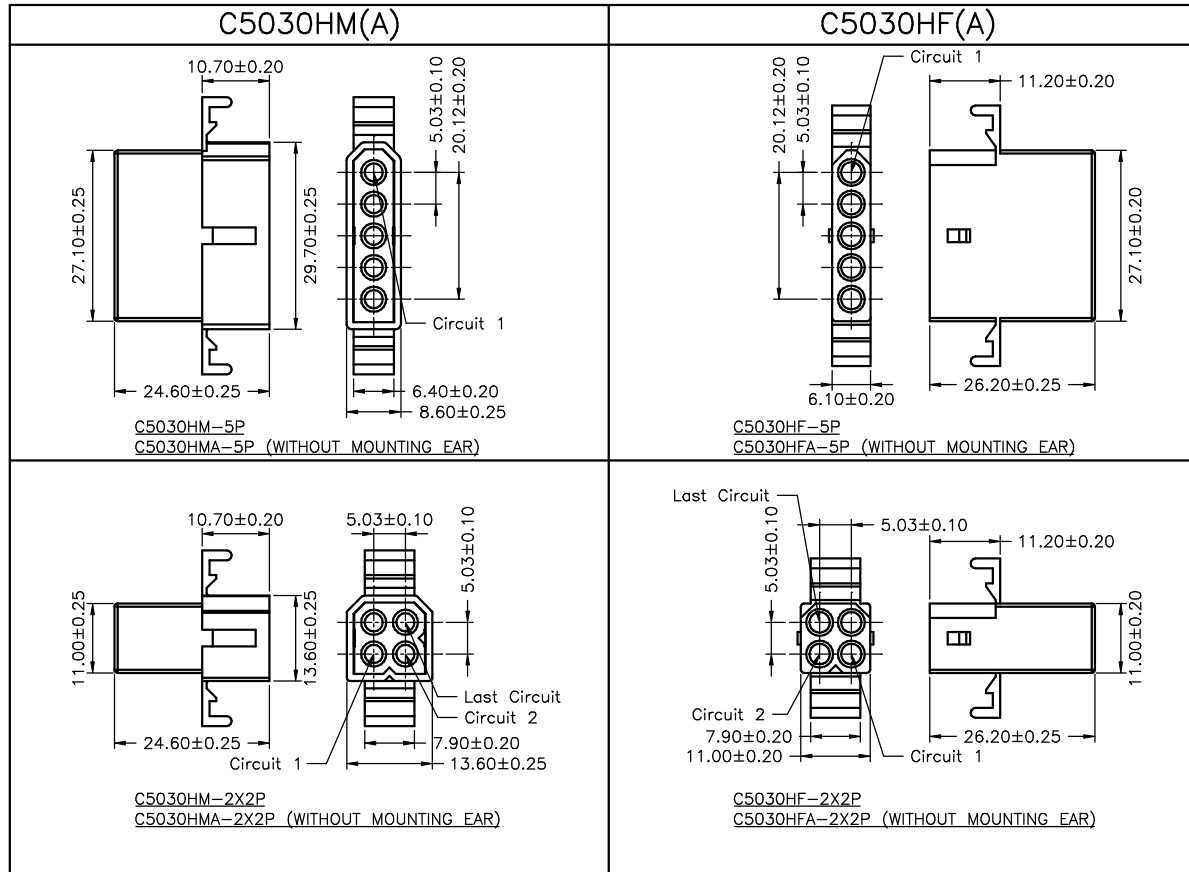


**SPECIFICATIONS**  
 Current Rating: 12A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Material: Nylon 66,UL94V-2  
 Color: Natural(Translucent)

				JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.	
		UNIT	SCALE	SHEET	TITLE:
		mm		3 of 5	<b>5.03mm PITCH HOUSING</b>
		DRAWN BY	APPROVED BY		
		蕭惠鳳	董正一		
		2002.10.02	2002.10.02		
		GENERAL TOLERANCE			
		X. X±0.25	ANGLE±		DRAW NO. : C5030HX(A)-XP
		X. XX±0.15			
		X. XXX±0.05			
B0	NEW RELEASE	2006.03.08			
REV.	DESCRIPTION	DATE			

Ordering Information & Dimensions

C5030HM(A)	C5030HF(A)

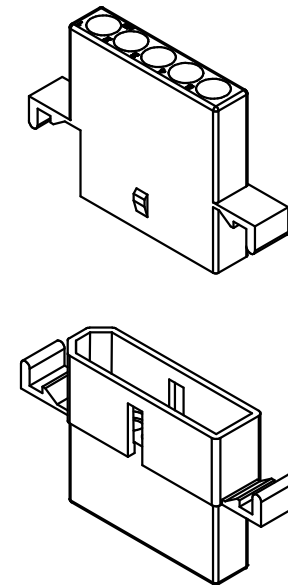

**SPECIFICATIONS**  
 Current Rating: 12A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range: -25°C ~ +85°C  
 Contact Resistance: 10mΩ Max  
 Insulation Resistance: 1000MΩ Min  
 Withstanding Voltage: 1500V AC/minute  
 Material: Nylon 66,UL94V-2  
 Color: Natural(Translucent)

		UNIT	SCALE	SHEET	TITLE:  <b>5.03mm PITCH HOUSING</b>
		mm		2 of 5	
		DRAWN BY 蕭惠鳳	APPROVED BY 董正一		
		2002.10.02	2002.10.02		
GENERAL TOLERANCE					
		X. X±0.25	ANGLE±		DRAW NO. : C5030HX(A)-XP
B0	NEW RELEASE	2006.03.08	X. XX±0.15		
REV.	DESCRIPTION	DATE	X. XXX±0.05		
					REV. B0