



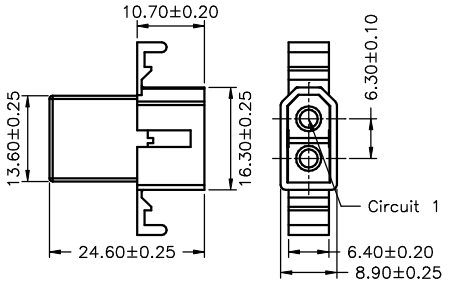


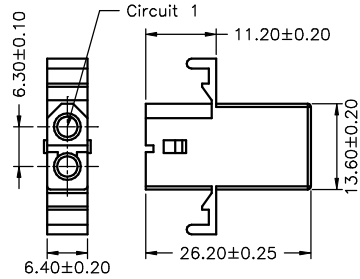

Ordering Information & Dimensions



C5030HM(A)	C5030HF(A)
 <p data-bbox="443 646 560 667">C5030HM-1P</p>	 <p data-bbox="1041 646 1153 667">C5030HF-1P</p>
 <p data-bbox="324 1053 672 1093">C5030HM-2P C5030HMA-2P (WITHOUT MOUNTING EAR)</p>	 <p data-bbox="918 1053 1265 1093">C5030HF-2P C5030HFA-2P (WITHOUT MOUNTING EAR)</p>

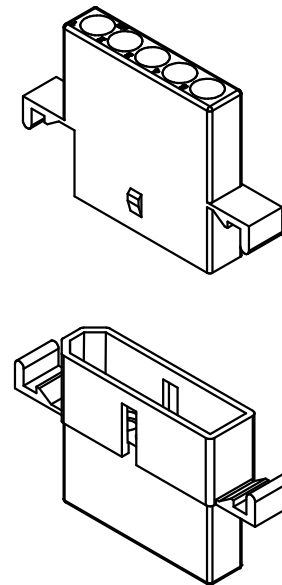

SPECIFICATIONS
 Current Rating: 12A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-2
 Color: Natural(Translucent)

			 JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.			
			UNIT	SCALE	SHEET	TITLE: 5.03mm PITCH HOUSING
			mm		1 of 5	
			DRAWN BY	APPROVED BY		
			蕭惠鳳	董正一		
			2002.10.02	2002.10.02		
			GENERAL TOLERANCE			
			X. X±0.25	ANGLE±		
B0	NEW RELEASE	2006.03.08	X. XX±0.15			DRAW NO. :
REV.	DESCRIPTION	DATE	X. XXX±0.05			C5030HX(A)-XP
						REV. B0



Ordering Information & Dimensions

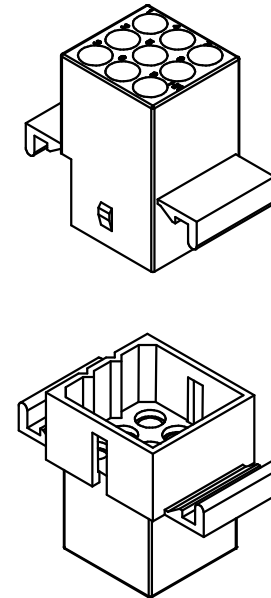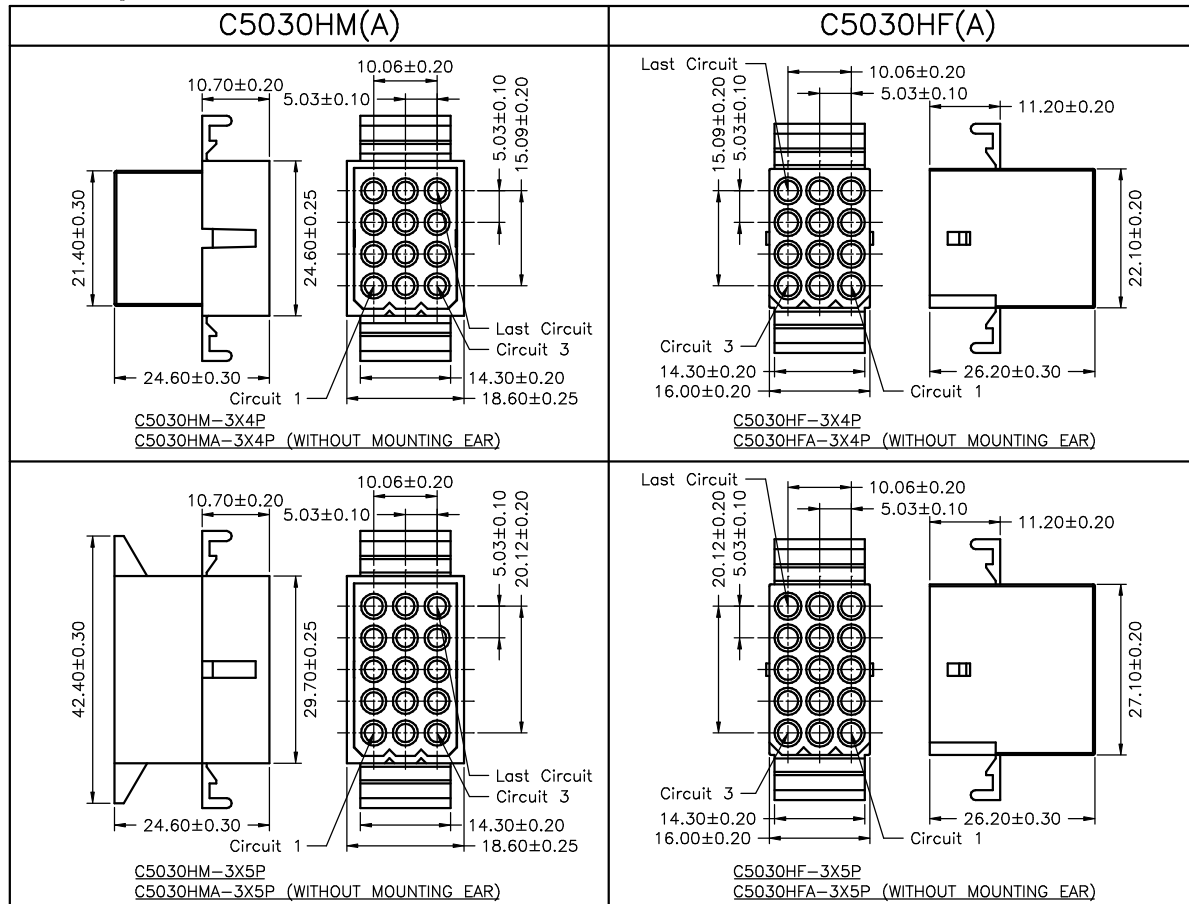

SPECIFICATIONS
 Current Rating: 12A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-2
 Color: Natural(Translucent)

			UNIT	SCALE	SHEET
			mm		5 of 5
			DRAWN BY	APPROVED BY	
			蕭惠鳳	董正一	
			2002.10.02	2002.10.02	
			GENERAL TOLERANCE		
			X. X±0.25	ANGLE±	
			X. XX±0.15		
			X. XXX±0.05		
BO	NEW RELEASE	2006.03.08			
REV.	DESCRIPTION	DATE			
					TITLE:
					5.03mm PITCH HOUSING
					DRAW NO. :
					C5030HX(A)-XP
					REV. B0



Ordering Information & Dimensions

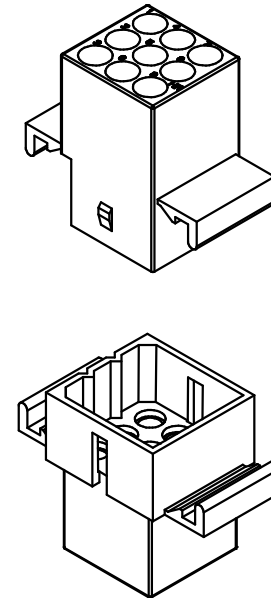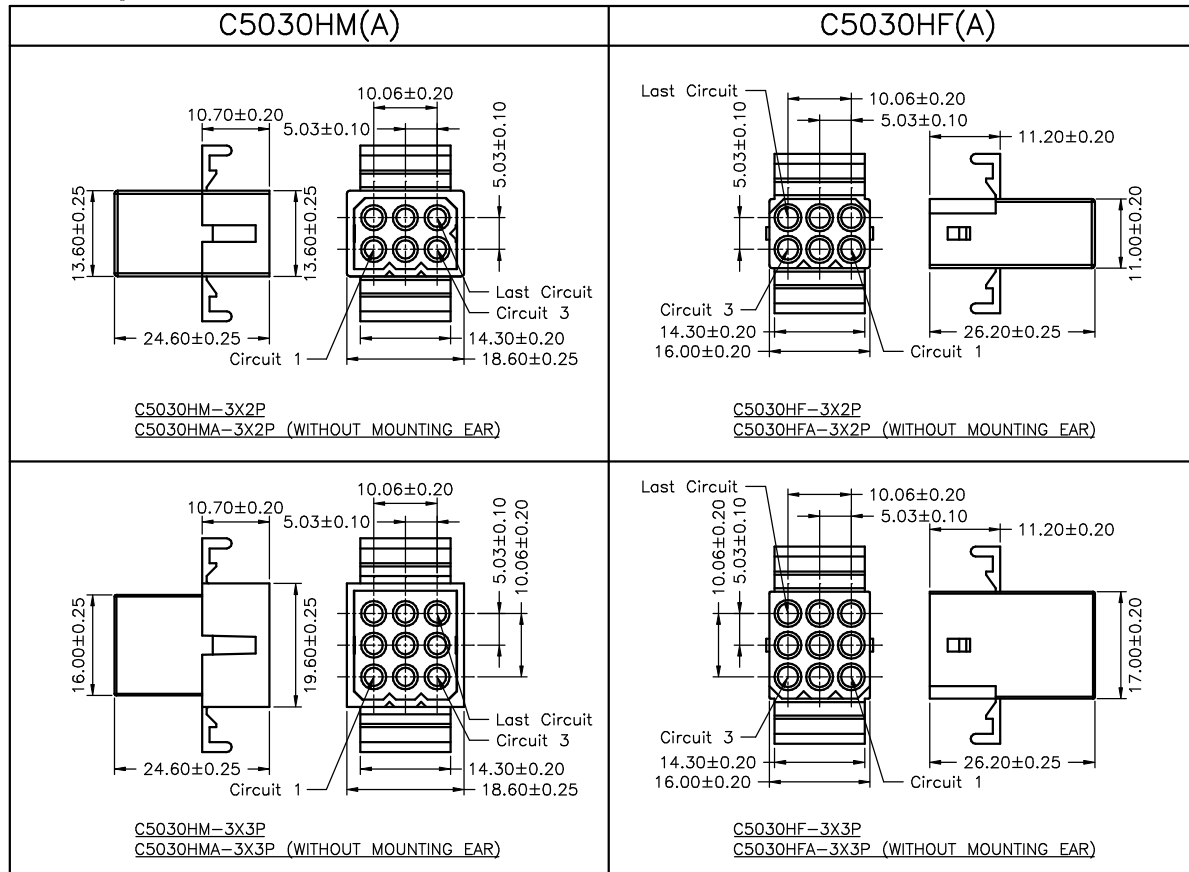

SPECIFICATIONS
 Current Rating: 12A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-2
 Color: Natural(Translucent)

				JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.	
		UNIT	SCALE	SHEET	TITLE:
		mm		4 of 5	5.03mm PITCH HOUSING
		DRAWN BY	APPROVED BY		
		蕭惠鳳	董正一		
		2002.10.02	2002.10.02		
		GENERAL TOLERANCE			
		X. X±0.25	ANGLE±		
B0	NEW RELEASE	2006.03.08	X. XX±0.15		
REV.	DESCRIPTION	DATE	X. XXX±0.05		
				DRAW NO. :	REV. B0
				C5030HX(A)-XP	





Ordering Information & Dimensions

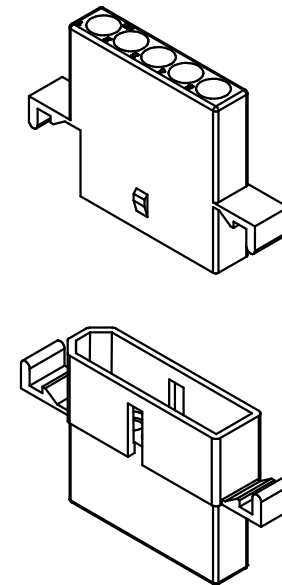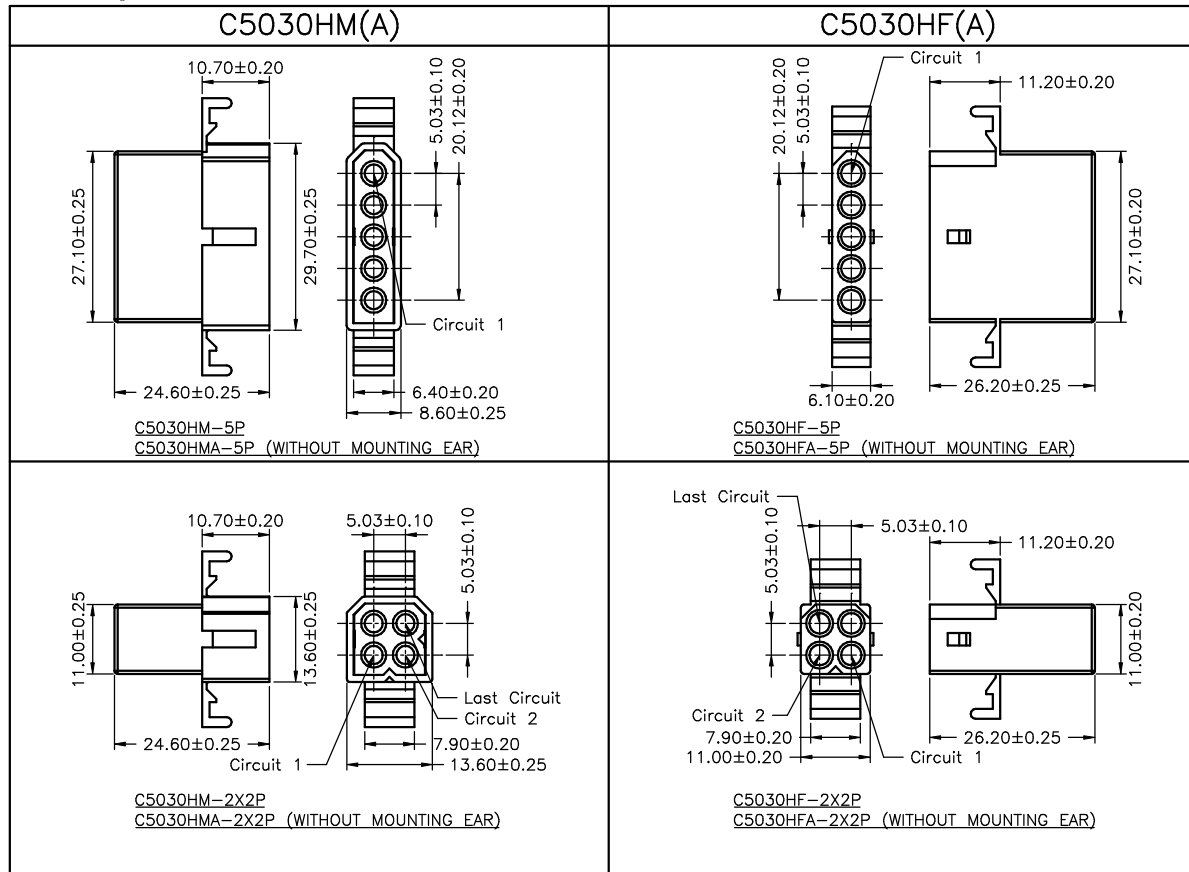


SPECIFICATIONS
 Current Rating: 12A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-2
 Color: Natural(Translucent)



				JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.	
		UNIT	SCALE	SHEET	TITLE:
		mm		3 of 5	5.03mm PITCH HOUSING
		DRAWN BY	APPROVED BY		
		萧惠顺	董正一		
		2002.10.02	2002.10.02		
		GENERAL TOLERANCE			
		X. X±0.25	ANGLE±		DRAW NO. : C5030HX(A)-XP
		X. XX±0.15			
		X. XXX±0.05			
B0	NEW RELEASE	2006.03.08			
REV.	DESCRIPTION	DATE			

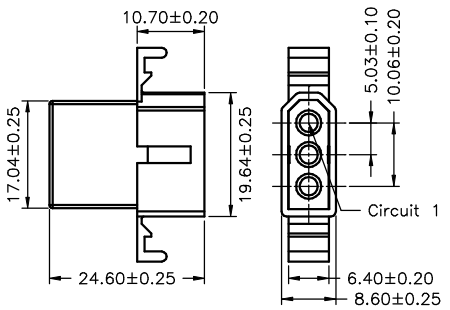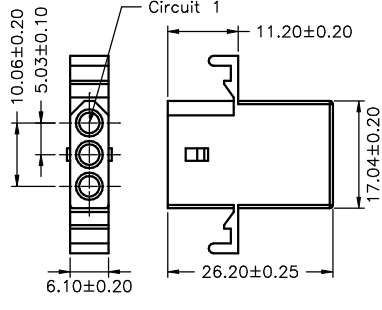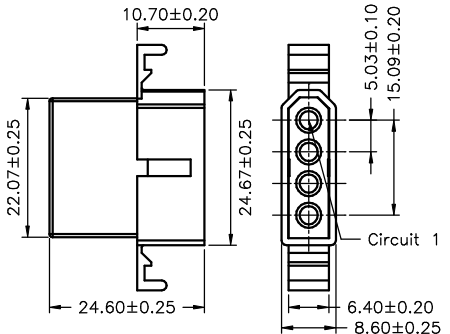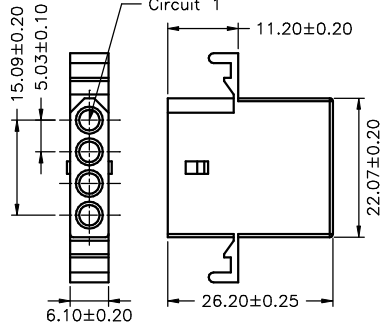Ordering Information & Dimensions

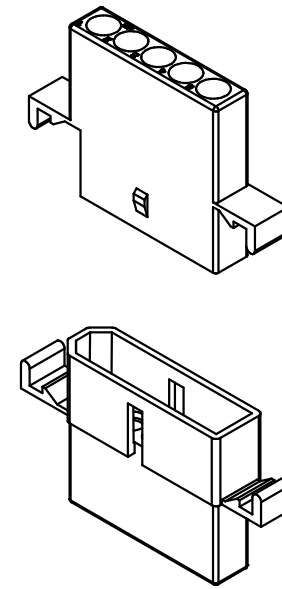C5030HM(A)	C5030HF(A)
 <p>C5030HM-3P C5030HMA-3P (WITHOUT MOUNTING EAR)</p>	 <p>C5030HF-3P C5030HFA-3P (WITHOUT MOUNTING EAR)</p>
 <p>C5030HM-4P C5030HMA-4P (WITHOUT MOUNTING EAR)</p>	 <p>C5030HF-4P C5030HFA-4P (WITHOUT MOUNTING EAR)</p>



SPECIFICATIONS
 Current Rating: 12A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1500V AC/minute
 Material: Nylon 66,UL94V-2
 Color: Natural(Translucent)

				JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.	
		UNIT	SCALE	SHEET	TITLE:
		mm		2 of 5	5.03mm PITCH HOUSING
		DRAWN BY	APPROVED BY		
		蕭惠鳳	董正一		
		2002.10.02	2002.10.02		
		GENERAL TOLERANCE			
		X. X±0.25	ANGLE±		DRAW NO. : C5030HX(A)-XP
BO	NEW RELEASE	2006.03.08	X. XX±0.15		
REV.	DESCRIPTION	DATE	X. XXX±0.05		