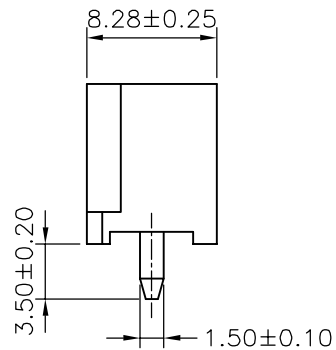
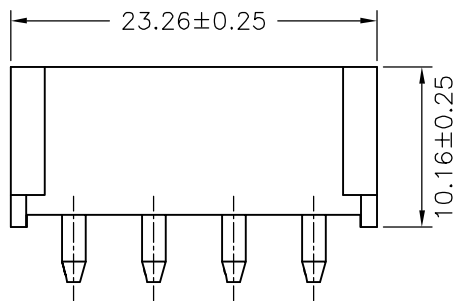





P.C.B. LAYOUT



SPECIFICATIONS

Current Rating: 10A AC,DC  
 Voltage Rating: 250V AC,DC  
 Temperature Range:  $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$   
 Contact Resistance: 10m $\Omega$  Max  
 Insulation Resistance: 1000M $\Omega$  Min  
 Withstanding Voltage: 1500V AC/minute  
 Pin Material: Brass/Tin-plated  
 Material: Nylon 66,UL94V-2  
 Color: Natural(Translucent)

|      |             |   |                   |   |  |
|------|-------------|---|-------------------|---|--|
|      |             |  |                   | JOINT TECH ELECTRONIC IND. CO., LTD.<br>JOY DAY INDUSTRIAL CO., LTD.                  |  |
|      |             | UNIT  | SCALE             | SHEET   | TITLE:   |
|      |             | mm  |                   | 1 of 1  | P/N: C5080WV-04P<br>5.08mm PITCH<br>180° WAFER |
|      |             | DRAWN BY  | APPROVED BY       |   |  |
|      |             | 歐陽小強<br>2007.04.25  | 董正一<br>2007.04.25 |   |  |
|      |             | GENERAL TOLERANCE   |                   |   |  |
|      |             | X. X±0.25   | ANGLE±            |   | DRAW NO.: C5080WV-04P                          |
| A0   | NEW RELEASE | 2007.04.25  | X. XX±0.15        |  |  |
| REV. | DESCRIPTION | DATE  | X. XXX±0.05       |   |  |