

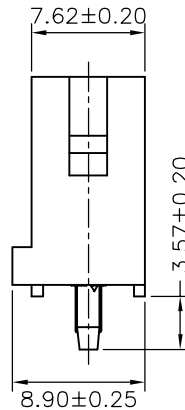



SPECIFICATIONS

Current Rating: 15A AC,DC
 Voltage Rating: 600V AC,DC
 Temperature Range: $-25^{\circ}\text{C} \sim +85^{\circ}\text{C}$
 Contact Resistance: 3.5mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 5000V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-0
 Color: Natural(White)

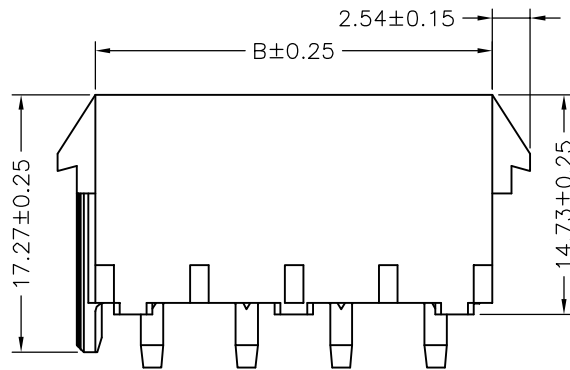

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
C6350WV-F-02PMV0	6.35	13.97
C6350WV-F-03PMV0	12.70	20.32
C6350WV-F-04PMV0	19.05	26.67
C6350WV-F-05PMV0	25.40	33.02
C6350WV-F-06PMV0	31.75	39.37
C6350WV-F-08PMV0	44.45	52.07

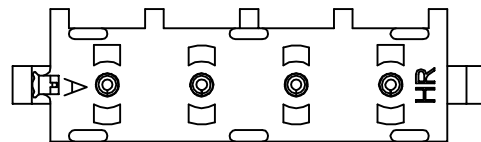

				UNIT	SCALE	SHEET	TITLE:
				mm		1 of 1	
DRAWN BY		APPROVED BY		6.35mm PITCH 180° SINGLE ROW WAFER, POLARIZING PEG, MALE TYPE			
李勤		董正一					
2006.02.25		2006.02.25					
GENERAL TOLERANCE				ANGLE±			
A1	REVISE	2007.09.14	X.X±0.25				
A0	NEW RELEASE	2006.02.25	X.XX±0.15				
REV.	DESCRIPTION	DATE	X.XXX±0.05				
				DRAW NO.:		REV.	
				C6350WV-F-XPV0		A1	

