



| No. | Part No. | Description | Material | Color |
|-----|---------------------|--------------|------------------|-------|
| 1 | | Insulator | Nylon 46,UL94V-0 | Black |
| 2 | F0506HA-51P | Ground plate | Stainless | --- |
| 3 | | Lock lever | Stainless | --- |
| 4 | F0506HA-51P-C | Cap | Nylon 46,UL94V-0 | Black |
| 5 | TCF0506HA-T-51P-QS0 | Top cover | Stainless | --- |

| | | | | | |
|----------------------------|------------|--------------------|---|--|--|
| | | | | JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD. | |
| UNIT | SCALE | SHEET | TITLE: | | |
| mm | | 1 of 2 | 0.50mm PITCH CONNECTOR FOR FFC, LOCK TYPE | | |
| DRAWN BY 歐陽小強 | | APPROVED BY 謝瑞清 | | | |
| 2009.06.22 | | 2009.06.22 | DRAW NO. : F0506HA-51P-001 | | |
| A2 EN0911300586 2009.11.30 | | GENERAL TOLERANCE | | REV. A2 | |
| A1 ECN NO. EN0910150500 | 2009.10.15 | X.X±0.25 | ANGLE± | | |
| A0 NEW RELEASE | 2009.06.22 | X.XX±0.15 | | | |
| REV. DESCRIPTION | DATE | X.XXX±0.05 | | | |

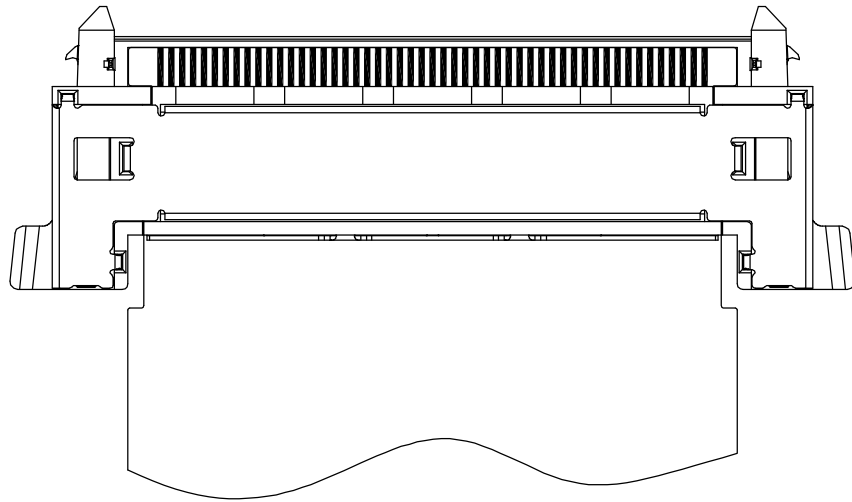

Mated condition (REF.)

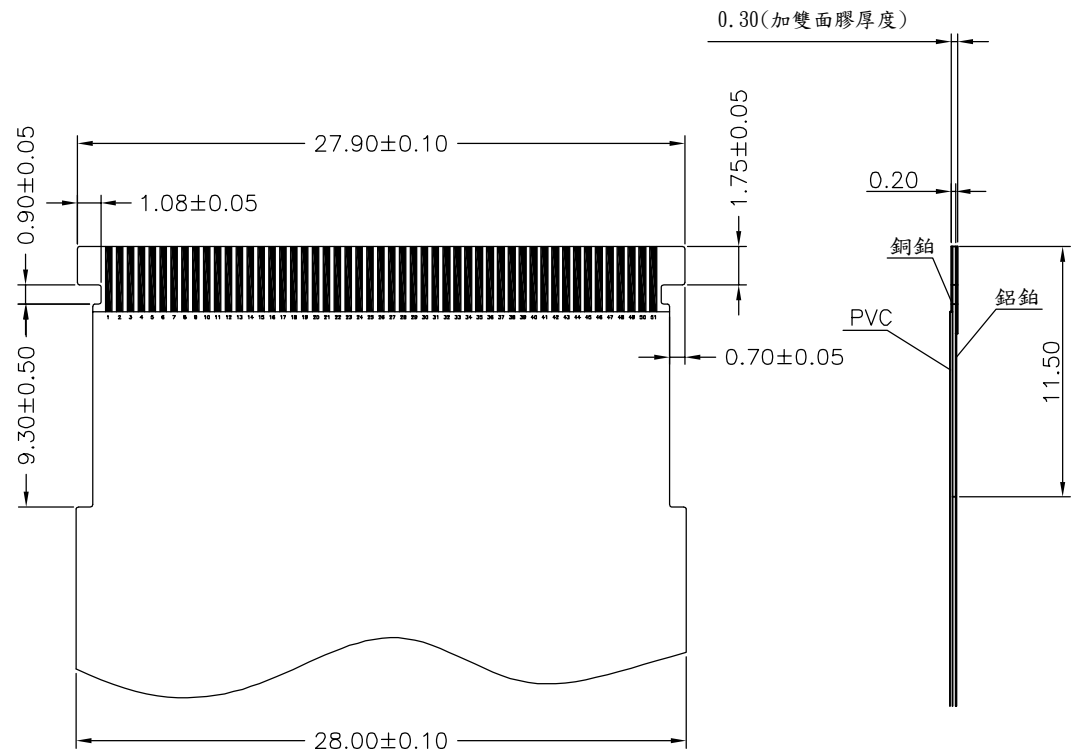

Recommended FFC dimension
FFC T=0.30mm

| | | | | | | |
|------|-------------|------------|--------------------|-------------------|--------|---|
| | | | | | | |
| | | | UNIT | SCALE | SHEET | TITLE: P/N:F0506HA-51P-001, 0.50mm PITCH CONNECTOR FOR FFC, LOCK TYPE |
| | | | mm | | 2 of 2 | |
| | | | DRAWN BY | APPROVED BY | | |
| | | | 歐陽小強 2009.06.22 | 謝瑞清 2009.06.22 | | |
| | | | GENERAL TOLERANCE | | | DRAW NO. : F0506HA-51P-001 |
| | | | X. X±0.25 | ANGLE± | | |
| | | | X. XX±0.15 | | | |
| A0 | NEW RELEASE | 2009.06.22 | X. XXX±0.05 | | | REV. A0 |
| REV. | DESCRIPTION | DATE | | | | |