






02P

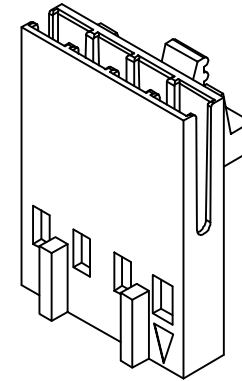

03P





SPECIFICATIONS
 Current Rating: 2A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 500V AC/minute
 Material: PBT30%GF,UL94V-0
 Color: Natural(Black)

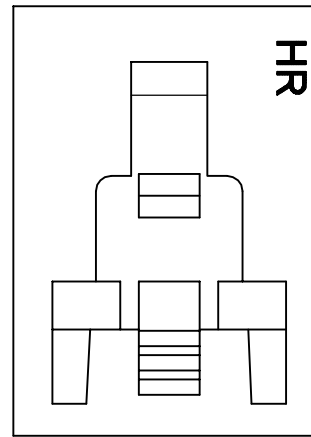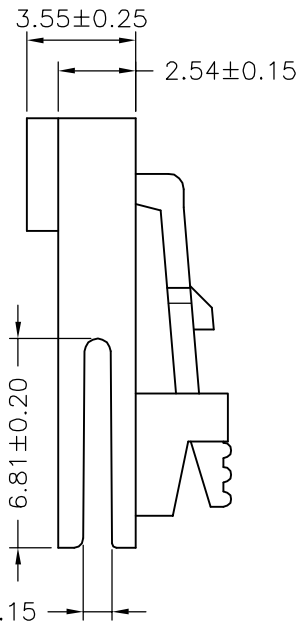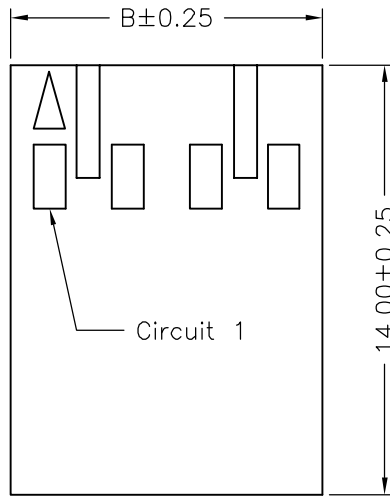

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
F2544H-02P-LB	2.54	5.08
F2544H-03P-LB	5.08	7.62
F2544H-04P-LB	7.62	10.16
F2544H-05P-LB	10.16	12.70
F2544H-06P-LB	12.70	15.24
F2544H-07P-LB	15.24	17.78
F2544H-08P-LB	17.78	20.32
F2544H-09P-LB	20.32	22.86
F2544H-10P-LB	22.86	25.40
F2544H-11P-LB	25.40	27.94
F2544H-12P-LB	27.94	30.48
F2544H-14P-LB	33.02	35.56

		 JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.	
		UNIT	SCALE
		mm	1 of 1
		DRAWN BY	APPROVED BY
		蕭惠風	謝瑞清
		2004.03.16	2004.03.16
		GENERAL TOLERANCE	
B1	REVISE	2007.11.30	X.X±0.25
B0	NEW RELEASE	2005.12.05	X.XX±0.15
REV.	DESCRIPTION	DATE	X.XXX±0.05
		ANGLE±	
			
DRAW NO.:			REV.
F2544H-XP-LB			B1

TITLE:
 2.54mm PITCH
 HOUSING WITH LOCK,
 FFC CONNECTOR, B TYPE