



**SUGGESTED PCB LAYOUT
(COMPONENT SIDE)**

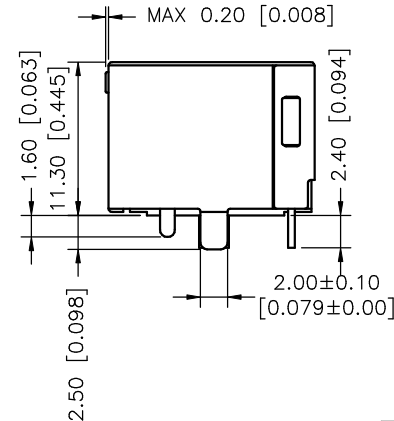

**ORDER INFORMATION
HRJC15-S8862-X**

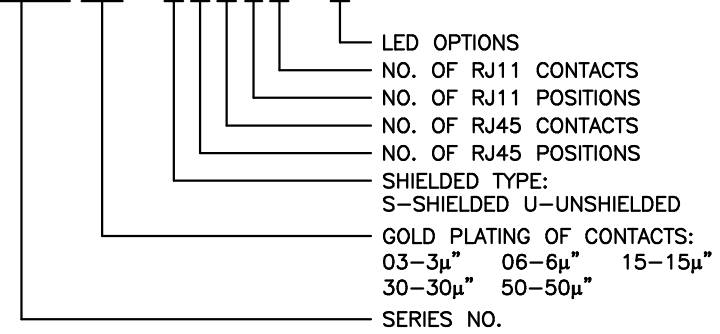

- 1.MATERIAL:**
HOUSING: PBT, BLACK, UL94V-0
CONTACTS: 0.35[0.014] THICK PHOSPHOR BRONZE PLATED WITH 100µ" MINIMUM THICK TIN IN SOLDER AREA. 15µ" MINIMUM GOLD IN LOCALIZED PLATE AREA. ENTIRE CONTACTS PLATED WITH 30µ" MINIMUM THICK NICKEL.
SHIELDED: 0.25[0.0098] THICK COPPER ZINC ALLOY PLATED WITH 30µ" MINIMUM THICK NICKEL.
- 2.JACK CAVITY CONFORMS TO FCC RULES AND REGULATIONS PART 68, SUBPART F.**
- 3.PART NUMBER: HRJC15-S8862-X**
REFER TO LED OPTIONS TABLE FOR ORDERING CODES

				JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.	
		UNIT	SCALE	SHEET	TITLE:
		mm[inch]		1 of 1	RJ45 W/LED & RJ11, MODULAR JACK, SIDE BY SIDE, SHIELDED, THRU-HOLE
		DRAWN BY	APPROVED BY		
		董正一	謝瑞清		
		2002.02.01	2002.02.01		
		GENERAL TOLERANCE			
		X. X±0.25	ANGLE±		
B0	NEW RELEASE	2005.12.25	X. XX±0.15	DRAW NO. : HRJC15-S8862-X	
REV.	DESCRIPTION	DATE	X. XXX±0.05		