

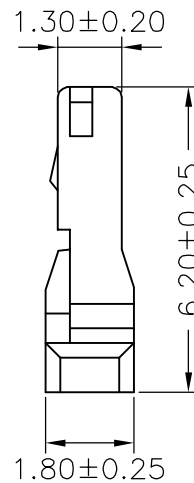
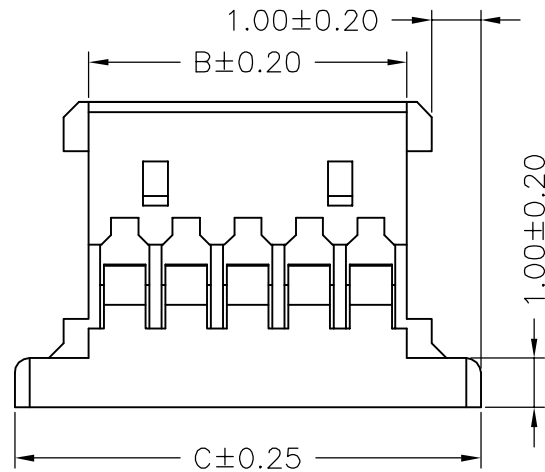


SPECIFICATIONS
 Current Rating: 1A AC,DC
 Voltage Rating: 125V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 20mΩ Max.
 Insulation Resistance: 100MΩ Min.
 Withstanding Voltage: 500V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Natural(Beige)

Ordering Information & Dimensions

PART NO.	Dimensions		
	A	B	C
A1254H-02P	1.25	2.72	5.72
A1254H-03P	2.50	3.97	6.97
A1254H-04P	3.75	5.22	8.22
A1254H-05P	5.00	6.47	9.47
A1254H-06P	6.25	7.72	10.72
A1254H-07P	7.50	8.97	11.97
A1254H-08P	8.75	10.22	13.22
A1254H-09P	10.00	11.47	14.47
A1254H-10P	11.25	12.72	15.72
A1254H-11P	12.50	13.97	16.97
A1254H-12P	13.75	15.22	18.22
A1254H-14P	16.25	17.72	20.72
A1254H-15P	17.50	18.97	21.97
A1254H-16P	18.75	20.22	23.22
A1254H-20P	23.75	25.22	28.22
A1254H-30P	36.25	37.72	40.72

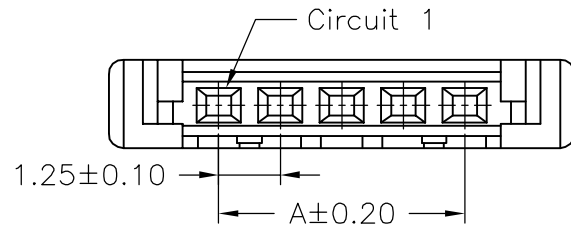

			JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.		
		UNIT	SCALE	SHEET	
		mm		1 of 1	
		DRAWN BY		APPROVED BY	
		董正一		董正一	
		2001.02.01		2001.02.01	
GENERAL TOLERANCE					
B1	REVISE	2006.07.04	X.X±0.25	ANGLE±	
B0	NEW RELEASE	2005.12.08	X.XX±0.15		
REV.	DESCRIPTION	DATE	X.XXX±0.05		
				DRAW NO.:	
				A1254H-XP	
					REV. B1

TITLE:
 1.25mm PITCH
 HOUSING
 ULTRA LOW PROFILE