



P.C.B LAYOUT

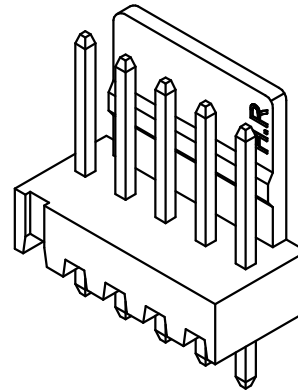

SPECIFICATIONS
 Current Rating: 4A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 1000V AC/minute
 Pin Material: Brass/Tin-plated
 Material: Nylon 66,UL94V-2
 Pantone Color: 7506C

Ordering Information & Dimensions

PART NO.	Dimensions	
	A	B
A2542WV-02P	2.54	5.08
A2542WV-03P	5.08	7.62
A2542WV-04P	7.62	10.16
A2542WV-05P	10.16	12.70
A2542WV-06P	12.70	15.24
A2542WV-07P	15.24	17.78
A2542WV-08P	17.78	20.32
A2542WV-09P	20.32	22.86
A2542WV-10P	22.86	25.40
A2542WV-11P	25.40	27.94
A2542WV-12P	27.94	30.48
A2542WV-13P	30.48	33.02
A2542WV-14P	33.02	35.56
A2542WV-15P	35.56	38.10
A2542WV-16P	38.10	40.64
A2542WV-17P	40.64	43.18
A2542WV-18P	43.18	45.72
A2542WV-19P	45.72	48.26
A2542WV-20P	48.26	50.80

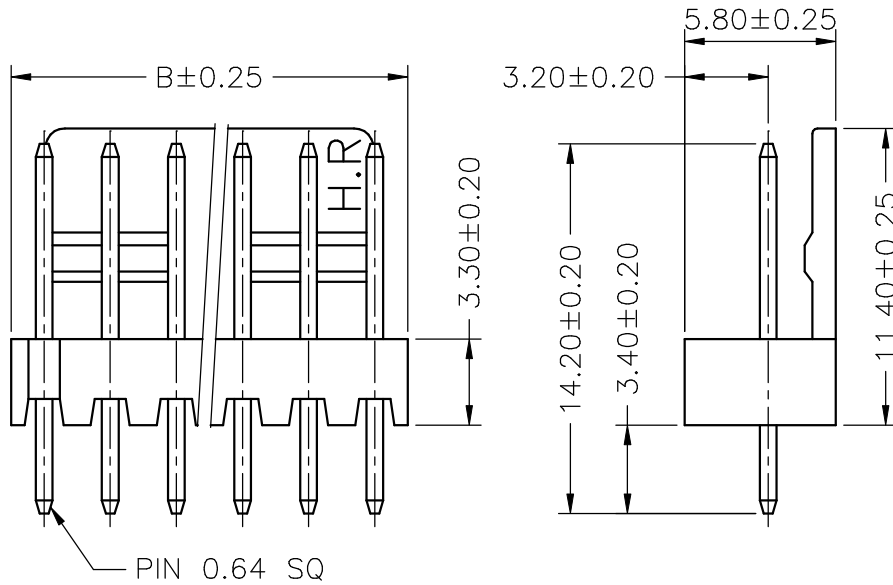

				JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.		
UNIT	SCALE	SHEET	TITLE:			
mm		1 of 1	2.54mm PITCH 180° WAFER			
DRAWN BY		APPROVED BY				
董正一		董正一				
2001.02.01		2001.02.01				
GENERAL TOLERANCE						
		X. X±0.25	ANGLE±			
B0	NEW RELEASE	2006.04.12	X. XX±0.15	DRAW NO. : A2542WV-XP		
REV.	DESCRIPTION	DATE	X. XXX±0.05			REV. B0