



SPECIFICATIONS
 Current Rating: 3A AC,DC
 Voltage Rating: 250V AC,DC
 Temperature Range: -25°C ~ +85°C
 Contact Resistance: 10mΩ Max
 Insulation Resistance: 1000MΩ Min
 Withstanding Voltage: 800V AC/minute
 Material: Nylon 66,UL94V-0
 Color: Natural(White)

Ordering Information & Dimensions


PART NO.	Dimensions	
	A	B
B2512HV-02P	2.50	6.50
B2512HV-03P	5.00	9.00
B2512HV-04P	7.50	11.50
B2512HV-05P	10.00	14.00
B2512HV-06P	12.50	16.50
B2512HV-07P	15.00	19.00
B2512HV-08P	17.50	21.50
B2512HV-09P	20.00	24.00
B2512HV-10P	22.50	26.50
B2512HV-11P	25.00	29.00
B2512HV-12P	27.50	31.50
B2512HV-13P	30.00	34.00
B2512HV-14P	32.50	36.50
B2512HV-15P	35.00	39.00
B2512HV-16P	37.50	41.50

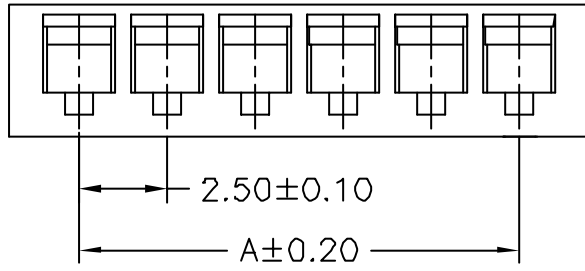

P.C.B LAYOUT



Circuit 1

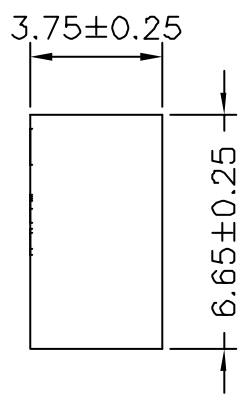

						JOINT TECH ELECTRONIC IND. CO., LTD. JOY DAY INDUSTRIAL CO., LTD.	
		UNIT	SCALE	SHEET	TITLE: 2.50mm PITCH 180 HOUSING		
		mm		1 of 1			
		DRAWN BY	APPROVED BY				
		董正一	董正一				
		2001.02.01	2001.02.01		DRAW NO.: B2512HV-XP		
		GENERAL TOLERANCE					
B1	REVISE	2006.08.26	X.X ±0.25	ANGLE ±			
B0	NEW RELEASE	2005.12.06	X.XX ±0.15				
REV.	DESCRIPTION	DATE	X.XXX ±0.05		REV. B1		